



Troubleshooting

Version 25.4.1.6, 13 May 2026

Table of Contents

1. Troubleshooting Guide Overview	1
1.1. Scope	1
1.2. Troubleshooting Approach	1
1.3. Supported Platforms	2
2. System Health	3
2.1. Container	3
2.1.1. Checking the Container Status	3
2.1.2. Recovering from a Container Failure	3
2.2. Brick Daemons	4
2.2.1. Display the Process Status	4
2.2.2. Core Dump	6
2.2.3. Recovering from a BD Failure	7
2.3. Running Configuration	8
2.3.1. Verifying the Configuration	8
2.3.2. Restoring a Configuration	8
2.4. License	9
2.4.1. Verifying a License	9
2.4.2. Restoring or Updating a License	10
2.5. Control Daemon	10
2.6. System Utilization	11
2.6.1. Memory and CPU Verification	11
2.6.2. Disk Space	19
3. Physical Layer	22
3.1. Link Failures	22
3.2. Hardware Failures	24
4. Application Layer	26
4.1. Fabric Operation	26
4.1.1. Fabric Protocols	26
4.1.2. Transport-layer Routing	28
4.1.3. Fabric Connectivity	28
4.2. Subscriber Services	29
4.2.1. Subscriber Sessions	29

4.2.2. RADIUS	32
4.2.3. PPPoE Sessions	34
4.2.4. L2TP Sessions	36
4.2.5. Service-Layer Connectivity	37
4.3. Host Path Capturing	38
4.3.1. Physical Interface	38
4.3.2. Logical Interface	39
4.3.3. Shared Memory Interface	39
4.3.4. ACL-based Packet Capturing	39
4.3.5. Filtering by Protocol	41
4.3.6. Raw Format	41
4.3.7. PCAP File	42
5. Logging	43
5.1. Log Files	43
5.1.1. Log Files on the Host OS	43
5.1.2. Log Files in the LXC	43
5.2. BDS Logging	44
5.2.1. Enabling BDS Logging	44
5.2.2. Inspecting Log Tables	45
6. Reporting Issues to RtBrick	47
6.1. Support Portal login page	47
6.2. Opening a case	47
6.3. Debugger Information Utility Program	48
6.3.1. How to Retrieve Data Using the Utility Program	49
6.3.2. Periodic Data Collection	50


1. Troubleshooting Guide Overview

1.1. Scope

This troubleshooting guide outlines how to troubleshoot devices running RBFS. It is intended for Network Operations teams typically performing monitoring, 1st or 2nd level support in a production environment. This guide helps the operator to identify if it is an RBFS issue, and to narrow down the device and the process or application that causes the issue. Troubleshooting for network engineering, or in-depth analysis of BDS tables is out-of-scope of this guide. It is assumed that the user of this guide is familiar with the basics of RBFS, as well as the basics of using a Linux-based network operating system. This guide will be continuously extended to cover failure scenarios which have occurred in production environments.

1.2. Troubleshooting Approach

There is no strict order in which various troubleshooting steps must be performed. The best approach will always depend on the nature of the problem observed. Generally speaking it is recommended to first perform some basic system health checks as described in the [System Health](#) section. Next, it's a general best network troubleshooting practice to verify the OSI layers from bottom to top. Applying this best practice to an RBFS fabric, it is recommended to first verify the physical layer as described in the [Physical Layer](#) section, then verify the operation of the fabric as described in the [Fabric Operation](#) section, and finally verify services that run on top of the fabric as described in the [Application Layer](#) section. Fabric and services protocol operation can be verified using the built-in RBFS capture tool explained in [Host Path Capturing](#) section. Section 5 describes RBFS logging capabilities that apply to all layers. Finally, the [Logging](#) section provides guidance when and how to report an issue to RtBrick. If you already know or have an indication what seems to be the trouble, you can of course directly proceed to that area and skip all prior steps proposed in this guide.

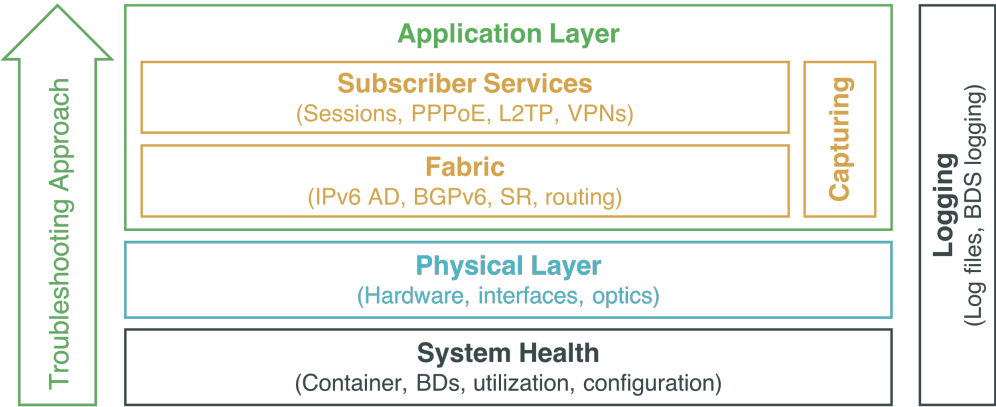

1.3. Supported Platforms

Not all features are necessarily supported on each hardware platform. Refer to the *Platform Guide* for the features and the sub-features that are or are not supported by each platform.

2. System Health

2.1. Container

The steps described in this section are performed on the host OS. For logging into the host OS instead of into the Linux container, use SSH port 1022 instead of the default port 22. Example:

```
ssh supervisor@10.10.0.100 -p 1022
```

2.1.1. Checking the Container Status

The RBFS services run in a Linux container (LXC). If you are able to log in into the container, obviously the container is running. If you are not able to log in, you can verify the status of the container on the host OS, i.e. RtBrick Host on hardware switches, as follows:

```
supervisor@spine1:~$ sudo lxc-ls -f
NAME      STATE   AUTOSTART GROUPS IPV4      IPV6
rtbrick   RUNNING 1        -      10.0.3.10 -
```

On a hardware switch, there will be a single container called "rtbrick" and the state shall be "Running". If the state is "Stopped" or "Failed", the container has failed and the system is in a non-operational state.

2.1.2. Recovering from a Container Failure

If the container exists but is not running, you can start it using the rtb-image tool:

```
supervisor@spine1:~$ sudo rtb-image container start rtbrick
```

Alternatively you can use the following lxc command:

```
supervisor@spine1:~$ sudo lxc-start -n rtbrick
```

If the container does not exist, or if starting it fail, you can try to recover by restarting the device at the RtBrick Host layer:

```
supervisor@spine1:~$ sudo reboot
```

2.2. Brick Daemons

2.2.1. Display the Process Status

You can check the running status of a brick daemon using the "show process status" command. The "show process usage summary" command provides information about the process usage status of a running brick daemon.

Example for the process status output.

```
supervisor@rtbrick.net: cfg> show process status
Name                Status                Uptime                Start Time
Auto Restart Count
bgp.appd.1          running              0y 0d 12h 14m 09s    Jul 24 2025 02:21:35
0
bgp.iod.1           running              0y 0d 12h 14m 08s    Jul 24 2025 02:21:36
0
confd               running              0y 0d 12h 17m 28s    Jul 24 2025 02:18:16
0
etcd                running              0y 0d 12h 17m 28s    Jul 24 2025 02:18:16
0
fibd                running              0y 0d 12h 17m 13s    Jul 24 2025 02:18:31
0
hostconfd           running              0y 0d 12h 17m 28s    Jul 24 2025 02:18:16
0
ifmd                running              0y 0d 12h 17m 12s    Jul 24 2025 02:18:32
0
lldpd               running              0y 0d 12h 17m 11s    Jul 24 2025 02:18:32
0
mribd               running              0y 0d 12h 17m 11s    Jul 24 2025 02:18:33
0
oamd                running              0y 0d 12h 17m 28s    Jul 24 2025 02:18:16
0
opsd                running              0y 0d 12h 17m 29s    Jul 24 2025 02:18:16
0
policy.server       running              0y 0d 12h 14m 07s    Jul 24 2025 02:21:37
0
poold               running              0y 0d 12h 17m 28s    Jul 24 2025 02:18:16
0
resmond             running              0y 0d 12h 17m 28s    Jul 24 2025 02:18:16
0
resmond-agent       running              0y 0d 12h 17m 28s    Jul 24 2025 02:18:16
0
restconfd           running              0y 0d 12h 17m 28s    Jul 24 2025 02:18:16
0
ribd                running              0y 0d 12h 17m 10s    Jul 24 2025 02:18:34
0
staticd             running              0y 0d 12h 17m 09s    Jul 24 2025 02:18:35
0
```

Example for the process status output for a specified process (daemon).

```
supervisor@rtbrick.net: dbg> show process stack-trace ribd
#0  0x00007fb3444cbdea in epoll_wait (epfd=3, events=0x7ffdef1c5840,
#1  0x00007fb344049bec in uv.io_poll () from /usr/local/lib/libuv.so.1
#2  0x00007fb34402c45b in uv_run () from /usr/local/lib/libuv.so.1
#3  0x00007fb344600804 in bd_event_loop_run_forever ()
#4  0x00005620c33db530 in main (argc=3, argv=0x7ffdef1c89d8)
```

Example output for the usage summary information for all the processes (daemons).

```
supervisor@rtbrick.net: cfg> show process usage summary
```

Name		PID	Virtual Memory	Resident Memory	Shared Memory
CPU %	Mem %	CPU Core			
bgp.appd.1		1265	88.33 MiB	41.99 MiB	16.34 MiB
0.00	0.26	0-7			
bgp.iod.1		1274	185.48 MiB	45.99 MiB	16.34 MiB
0.00	0.29	0-7			
confd		195	106.61 MiB	81.95 MiB	21.05 MiB
0.81	0.51	0-7			
etcd		176	52.82 MiB	38.40 MiB	14.19 MiB
0.00	0.24	0-7			
fibd		363	11.87 GiB	1.20 GiB	93.56 MiB
61.52	7.67	0-7			
ifmd		376	203.00 MiB	49.84 MiB	14.81 MiB
0.20	0.31	0-7			
lldpd		387	53.02 MiB	37.12 MiB	14.77 MiB
0.00	0.23	0-7			
mribd		396	85.36 MiB	40.04 MiB	14.93 MiB
0.20	0.25	0-7			
oamd		182	309.40 MiB	48.83 MiB	14.41 MiB
0.20	0.31	0-7			
policy.server		1285	52.89 MiB	37.03 MiB	14.72 MiB
0.00	0.23	0-7			
poold		186	50.95 MiB	36.40 MiB	14.20 MiB
0.00	0.23	0-7			
resmond		201	123.82 MiB	37.97 MiB	14.51 MiB
0.20	0.24	0-7			
ribd		407	128.52 MiB	51.26 MiB	15.02 MiB
0.00	0.32	0-7			
staticd		418	83.95 MiB	40.02 MiB	14.59 MiB
0.00	0.25	0-7			

RBFS runs multiple Brick Daemons (BD). You can verify the status of the daemons using the Debian system control (systemctl) or using the RBFS show command: 'show bd running-status'. The following commands will show all rtbrick services. The status should be "running":

Example 1: Show output using the Debian system control command

```
supervisor@rtbrick:~$ sudo systemctl list-units | grep rtbrick
```

```
var-rtbrick-auth.mount          loaded active   mounted /var/rtbrick/auth
rtbrick-alertmanager.service    loaded active   running  rtbrick-alertmanager service
rtbrick-bgp.appd.1.service      loaded active   running  rtbrick-bgp.appd.1 service
rtbrick-bgp.iod.1.service       loaded active   running  rtbrick-bgp.iod.1 service
<...>
```

Example 2: Show output using the 'show bd running-status' command

```
supervisor@rtbrick: op> show bd running-status
Daemon          Status
alertmanager    running
bgp.appd.1      running
bgp.iod.1       running
confd           running
etcd            running
fibd            running
<...>
```

Please note the supported BDs differ by role and may change in a future release. You can display further details as shown in the following example:

```
supervisor@rtbrick:~$ sudo systemctl status rtbrick-fibd.service

rtbrick-fibd.service - rtbrick-fibd service
   Loaded: loaded (/lib/systemd/system/rtbrick-fibd.service; enabled; vendor preset: enabled)
   Active: active (running) since Mon 2020-10-19 05:01:16 UTC; 4h 41min ago
     Process: 248 ExecStartPost=/bin/bash -c [ -f "/usr/local/bin/rtbrick-ems-service-event" ] && {
/usr/bin/python3 /usr/local/bin/rtbr
     Process: 240 ExecStartPre=/bin/mkdir -p /var/run/rtbrick/fibd_pipe (code=exited, status=0/SUCCESS)
     Process: 225 ExecStartPre=/usr/local/bin/rtbrick-bcm-sdk-symlink.bash (code=exited, status=0/SUCCESS)
     Process: 150 ExecStartPre=/usr/local/bin/rtbrick-vpp-startup-conf.bash (code=exited, status=0/SUCCESS)
   Main PID: 246 (vpp_main)
    CGroup: /system.slice/rtbrick-fibd.service
           246 /usr/local/bin/bd -i /etc/rtbrick/bd/config/fibd.json
```

If the status is "failed", the respective service or daemon has failed. A daemon failure is a major issue, and depending on which BD has failed, the system is likely to be in a non-operational state. If a BD has failed, inspect the system log (syslog) file as well as the respective BD log file as described in the [Logging](#) section, then proceed to sections [Verifying the Configuration](#) and [Restoring a Configuration](#), and finally report the failure to RtBrick as described in the [Reporting Issues to RtBrick](#) section.

2.2.2. Core Dump

If a BD fails, it shall create a core dump file. A core dump is a file containing a process's state like its address space (memory) when the process terminates unexpectedly. These files are located in /var/crash/rtbrick. If you have identified or suspect a BD failure, navigate to this directory and check for core dump files:

```
supervisor@rtbrick:~$ cd /var/crash/rtbrick/  
supervisor@rtbrick:/var/crash/rtbrick$ ls -l  
-rw-r--r-- 1 root root 3236888576 Apr  9 10:17 core.fibd_136_2020-04-09_10-16-52
```

If there is a core dump file, you can decode it using the GNU debugger tool like in the following example:

```
supervisor@rtbrick:/var/crash/rtbrick$ sudo gdb bd core.fibd_136_2020-04-09_10-16-52  
<...>
```

At the resulting 'gdb' prompt, type and enter 'bt' for backtrace:

```
(gdb) bt  
<...>
```

Report the resulting output to RtBrick as described in the [Reporting Issues to RtBrick](#) section. Analysing the core dump file will typically require support from RtBrick and is beyond the scope of this guide.

2.2.3. Recovering from a BD Failure

When a brick daemon (except FIBD) goes down, RBFS automatically restarts it up to three times within a 420-second window. After the seven-minute window, the daemon (except FIBD) can also be restarted with the “`sudo systemctl restart <daemon>`” or “`sudo service <daemon> restart`” command. The FIBD daemon is restarted up to three times within a 2678400-second window; after this, the device must be restarted manually to bring up the FIBD daemon. This functionality has been tested under multidimensional scale scenarios.

If the automatic restart does not succeed, you can use the Debian 12 system control to start a daemon like in the following example:

```
supervisor@rtbrick:~$ sudo systemctl start rtbrick-fibd.service
```

Alternatively you can recover from a BD failure by rebooting the container from the Linux container shell:

```
supervisor@rtbrick:~$ sudo reboot
```

2.3. Running Configuration

2.3.1. Verifying the Configuration

A missing running configuration is another possible problem scenario. There are several reasons why the system might be missing its configuration. Posting the running configuration might have failed for example due an invalid configuration syntax, or there was a connectivity issue between the device and the provisioning system.

You can easily verify via CLI if there is a running configuration:

```
supervisor@rtbrick: op> show config
```

If you suspect a configuration load issue, inspect the confd logs as well as the CtrlID log as describe in the [Logging](#) section.

2.3.2. Restoring a Configuration

It depends on the customer deployment scenario how a running configuration shall be applied or restored in case of an issue.

If the device already had a configuration previously, and you have saved it in a file, you can simply load it via the CLI:

```
supervisor@rtbrick: cfg> load config spine1-2020-10-19.json
```

If the device already had a configuration previously, and has been configured to load the last configuration with the 'load-last-config: true' attribute, you can restore it by rebooting the container at the Linux container shell:

```
supervisor@rtbrick:~$ sudo reboot
```

Otherwise you can also copy an automatically stored running configuration file into your user directory and load it manually like in the following example:

```
supervisor@leaf1:~$ sudo cp
/var/rtbrick/commit_rollback/766e102957bf99ec79100c2acfa9dbb9/config/running_config.json running_config.json

supervisor@leaf1:~$ ls -l
total 12
```

```
-rw-r--r-- 1 root root 8398 Oct 21 09:45 running_config.json

supervisor@leaf1:~$ cli
supervisor@leaf1: op> switch-mode config
Activating syntax mode : cfg [config]
supervisor@leaf1: cfg> load config running_config.json
supervisor@leaf1: cfg> commit
```

If it's a newly deployed or upgraded device, and there is out-of-band connectivity from your network management system, you can trigger the configuration from your NMS.

If it's a newly deployed or upgraded device, and the configuration shall be applied via a ZTP process from a local ZTP server, you need to reboot the device at the RtBrick Host layer in order to trigger the ZTP process:

```
supervisor@spine1:~$ sudo reboot
```

There is also an option to manually copy a configuration file to the device and into the container. If you have copied a configuration file via an out-of-band path to the RtBrick Host layer of the device, you can copy it into the container as follows. Please note the name in the directory path needs to match the name of the container, like "spine" in this example:

```
supervisor@spine1:~$ cp spine1-2020-10-19.json /var/lib/lxc/spine1/rootfs/home/supervisor/
```

Next you can load this configuration via the CLI as already described above:

```
supervisor@rtbrick: cfg> load config spine1-2020-10-19.json
```

2.4. License

RBFS software requires a license to ensure its legitimate use. The license will be automatically validated and enforced. After an initial grace period of 7 days, if a license is missing or expired, RBFS will be restricted. The CLI as well as the BDS APIs will not work anymore.

If all CLI commands do not work, the license might be missing or expired.

2.4.1. Verifying a License

You can verify the license via the CLI:

```
supervisor@rtbrick: op> show system license
License Validity:
  License index 1:
    Start date : Fri Mar 12 06:43:25 GMT +0000 2021
    End date   : Sat Mar 12 06:43:25 GMT +0000 2022
```

The output will indicate if there is a valid license, no license, or if the license is expired.

2.4.2. Restoring or Updating a License

The license is installed by configuration. If the license is missing but the device already had a license configuration previously, please restore the configuration as described in the Restoring a Configuration section above.

If the license is expired, please configure a new valid license key. If you do not have a license key yet, please contact your RtBrick support or sales representative to obtain a license.

2.5. Control Daemon

In addition to the Brick Daemons running inside the LXC container, there are some RBFS services running on the host OS. The most important one is CtrlD (Control Daemon). CtrlD acts as the single entry point to the system. Verify the status of CtrlD:

```
supervisor@spine1:~$ sudo service rtbrick-ctrld status
[....] Checking the rtbrick ctrld service:3751
. ok
```

If the status is not "ok", restart, start, or stop and start CtrlD:

```
supervisor@spine1:~$ sudo service rtbrick-ctrld restart

supervisor@spine1:~$ sudo service rtbrick-ctrld stop
supervisor@spine1:~$ sudo service rtbrick-ctrld start
```

If the status is "ok", but you suspect an issue related to CtrlD, inspect the ctrld logs as also described in section 5:

```
supervisor@spine1:/var/log$ more rtbrick-ctrld.log
```

2.6. System Utilization

There are cases when system-related information has to be checked: symptoms like sluggish response, or daemons/processes crashing repeatedly can mean that system resources are overutilized. In such cases first steps are to verify CPU, memory, and disk. Before, it is good to remember the general architecture of an RtBrick switch: we have the physical box, on which RtBrick Host sits. In RtBrick Host we run the LXC container (which has Debian 12 Bookworm installed), which in turn has RBFS running inside it.

In the following sections we'll mainly concentrate on the LXC container verifications, and will specify where the commands are executed in RtBrick Host. The order in which the commands are shown in this section can also be used to do the basic system troubleshooting.

2.6.1. Memory and CPU Verification

When suspecting the memory is overutilized, a quick way to verify that use **free**: this command provides information about unused and used memory and swap space. By providing the **-h** (human readable) flag, we can quickly see the memory availability of the system:

```
supervisor@rtbrick:~$ free -h
```

	total	used	free	shared	buff/cache	available
Mem:	31G	4.3G	24G	469M	2.3G	26G
Swap:	0B	0B	0B			

The output from **free** is based on what the system reads from **/proc/meminfo**; of importance are the **available** and **used** columns. The description of the fields can be seen below (since **man** is not available on the switches):

free command fields description

Name	Description
total	Total amount of memory that can be used by the applications.
used	Used memory, which is calculated as total - free - buffers - cache
free	Unused memory.
shared	Backwards compatibility, not used.

Name	Description
buff/cache	The combined memory used by the kernel buffers and page cache. This memory can be reclaimed at any time if needed by the applications.
available	Estimate of the amount of memory that is available for starting new applications. Does not account swap memory.

free has a few useful options that can be used:

- **-h** - human readable: makes the output easier to read, by using the common shortcuts for units (e.g M for mebibytes, G for gibibytes etc)
- **-t** - total: will display a total at the bottom of each column (basically adding physical+swap memory)
- **-s** - continuous print output (can be interrupted with Ctrl+C): by giving a **seconds** value at which the output is refreshed, you will get a continuous display of values (similar to the **watch** command; e.g **free -s 5**)

As it can be seen, **free** is a basic utility that displays relevant information in a compressed format. It does not offer detailed or real-time information about the running processes. As with the CPU, we can use **top** to obtain realtime information about memory usage

Another way to check memory consumption, as well as CPU utilization, is to use **top**; it is one of the most common ways to start troubleshooting a Linux-based system, because it provides a wealth of information, and, in general, is a good starting point for system troubleshooting.

Basically, this command allows users to monitor processes and CPU/memory usage, but, unlike many other commands, it does so in an interactive way. **top** output can be customized in many ways, depending on the information we want to focus on, but in this guide we will not go through all the possible options **top** has.

A typical **top** output looks like the one below:

```
supervisor@rtbrick:~$ top

top - 21:12:41 up 1 day,  8:13,  1 users,  load average: 2.66, 2.72, 2.73
Tasks:  46 total,   1 running,  45 sleeping,   0 stopped,   0 zombie
%Cpu(s): 12.4 us,  8.5 sy,   0.0 ni, 79.0 id,   0.0 wa,   0.0 hi,   0.1 si,   0.0 st
KiB Mem : 32785636 total, 26181044 free, 4135516 used, 2469076 buff/cache
```

```

KiB Swap:          0 total,          0 free,          0 used. 27834804 avail Mem

  PID USER      PR  NI   VIRT   RES   SHR  S  %CPU  %MEM     TIME+ COMMAND
  260 root        20   0 10.563g 1.473g 177440 S 109.3   4.7   2280:59 vpp_main
  108 root        20   0 406552 121648 46196 S  31.9   0.4   36:49.48 pppoe1.1
  168 root        20   0 3203196 40704  9824 S   7.0   0.1  117:40.63 rtbrick-resmond
  156 root        20   0 461888 134852 59328 S   2.3   0.4   38:11.79 subscriberd.1
  112 root        20   0 438592 140644 46892 S   2.0   0.4   36:35.40 igmp.iod.1
  166 root        20   0 408076 117936 43416 S   2.0   0.4   36:35.14 pim.iod.1
  176 root        20   0 392036 114596 40312 S   2.0   0.3   37:15.43 l2tpd.1
  183 root        20   0 586944 144644 51256 S   1.7   0.4   38:27.94 bgp.iod.1
  136 root        20   0 425212 147080 35636 S   1.3   0.4   22:50.32 resmond
  193 root        20   0 1453416 929168 93672 S   0.7   2.8   17:09.07 confd
  266 root        20   0 836892 107804 35424 S   0.7   0.3   17:59.60 prometheus
<...output omitted...>

```

top output is divided in two different sections: the upper half (summary area) of the output contains statistics on processes and resource usage, while the lower half contains a list of the currently running processes. You can use the arrow keys and Page Up/Down keys to browse through the list. If you want to quit, press “q” or Ctrl+C.

On the first line, you will notice the system time and the uptime, followed by the number of users logged into the system. The first row concludes with **load average** over one, five and 15 minutes. “Load” means the amount of computational work a system performs. In our case, the load is the number of processes in the R (runnable) and D (uninterruptible sleep) states at any given moment.

A word on process states

We’ve mentioned above about a “process state”. In Linux, a process may be in of these states:

- **Runnable (R)**: The process is either executing on the CPU, or it is present in the run queue, ready to be executed.
- **Interruptible sleep (S)**: The process is waiting for an event to complete.
- **Uninterruptible sleep (D)**: The process is waiting for an I/O operation to complete.
- **Zombie (Z)**: A process may create a number of child processes, which can exit while the parent is still active. However, the data structures that the kernel creates in memory to keep track of these child processes have to be maintained until the parent find out about the status of its child. These terminated processes who still have associated data structures in memory



are called zombies.

While looking at the summary area, it is also good practice to check if any zombie processes exist (on the **Tasks** row); a high number of zombies is indicative of a system problem.

The CPU-related statistics are on the **%CPU(s)** row:

- us: Time the CPU spends executing processes for users in “user space.”
- sy: Time spent running system “kernel space” processes.
- ni: Time spent executing processes with a manually set "nice" value (nice values determine the priority of a process relative to others - higher nice values of a process means that process will get a lower priority to run).
- id: CPU idle time.
- wa: Time the CPU spends waiting for I/O to complete.
- hi: Time spent servicing hardware interrupts.
- si: Time spent servicing software interrupts.
- st: Time lost due to running virtual machines (“steal time”).

For systems with multiple CPU cores, we can see the per-core load by pressing "1" in the interface; another useful way of visualisation is to have a graphical display of CPU load: this can be done by pressing "t" in the **top** interface. Below is an example of **top** with both "1" and "t" pressed:

```
top - 12:11:56 up 1 day, 23:12,  4 users,  load average: 2.76, 2.86, 2.97
Tasks: 58 total,  1 running, 57 sleeping,  0 stopped,  0 zombie
%Cpu0  :  5.6/1.6    7[|||||]
]
%Cpu1  : 59.8/40.2
100[|||||]
%Cpu2  : 19.0/2.0   21[|||||]
]
%Cpu3  : 20.5/3.1   24[|||||]
]
%Cpu4  :  2.1/3.4    5[||||]
]
%Cpu5  :  0.0/0.3    0[
]
%Cpu6  :  1.7/0.7    2[|||]
]
%Cpu7  :  2.0/2.0    4[||||]
]
GiB Mem : 31.267 total, 24.086 free,  4.059 used,  3.122 buff/cache
GiB Swap:  0.000 total,  0.000 free,  0.000 used. 26.328 avail Mem

  PID USER      PR  NI   VIRT   RES   SHR S  %CPU  %MEM     TIME+ COMMAND
 260 root        20   0 10.783g 1.486g 191704 S 142.7   4.8 521:41.08 vpp_main
 148 root        20   0 399540 120656 44336 S   2.3   0.4  3:15.48 lldpd
 124 root        20   0 461888 137532 59312 S   2.0   0.4  8:22.26 subscriberd.1
 136 root        20   0 485168 183640 58500 S   2.0   0.6 98:59.56 igmp.iod.1
```

```

180 root      20    0  588120 152332  52132 S   2.0   0.5   8:28.70 bgp.ioc.1
117 root      20    0  441872 137428  52904 S   1.7   0.4   9:59.74 pim.ioc.1
169 root      20    0  410648 131128  52828 S   1.7   0.4   8:50.00 pppoed.1
171 root      20    0  425068 148420  36016 S   1.7   0.5   4:50.66 resmond
176 root      20    0  388964 116732  40536 S   1.7   0.4   8:08.61 l2tpd.1
<...output omitted...>

```

The next two lines are dedicated to memory information, and as expected, the “total”, “free” and “used” values have their usual meanings. The “avail mem” value is the amount of memory that can be allocated to processes without causing more swapping.

As with “t”, the same thing can be done for displaying memory usage, but this time we will press “m”. It is also worth noting that we can change the units in which memory values are displayed by pressing “E” (pressing repeatedly will cycle through kibibytes, mebibytes, gibibytes, tebibytes, and pebibytes). The following example shows the unit changed from kibi to gibibytes:

```

top - 12:25:19 up 1 day, 23:26,  4 users,  load average: 3.29, 3.12, 3.05
Tasks: 58 total,  1 running, 57 sleeping,  0 stopped,  0 zombie
%Cpu(s): 17.2/6.9  24[|||||]
]
GiB Mem :  31.267 total,  24.081 free,   4.063 used,   3.123 buff/cache
GiB Swap:   0.000 total,   0.000 free,   0.000 used.  26.323 avail Mem
<...output omitted...>

```

Moving to the lower half of the output (the task area), here we can see the list of processes that are running on the system. Below you can find a short explanation for each of the columns in the task area:

top task area columns description

Name	Description
PID	process ID, a unique positive integer that identifies a process.
USER	the "effective" username of the user who started the process; Linux assigns a real user ID and an effective user ID to processes; the second one allows a process to act on behalf of another user (e.g.: a non-root user can elevate to root in order to install a package).
PR and NI	NI show the "nicety" value of a process, while the "PR" shows the scheduling priority from the perspective of the kernel. Higher nice values give a process a lower priority.

Name	Description
VIRT, RES, SHR and %MEM	these fields are related to the memory consumed by each process. "VIRT" is the total amount of memory consumed by a process. "RES" is the memory consumed by the process in RAM, and "%MEM" shows this value as a percentage of the total RAM available. "SHR" is the amount of memory shared with other processes.
S	state of the process, in single letter form.
TIME+	total CPU time used by the process since it started, in seconds/100.
COMMAND	the name of the process.



From a troubleshooting standpoint, check for processes that consume large amounts of CPU and/or memory. In the task area, of interest are the **RES**, for memory, and **%CPU** columns.

For a cleaner (and possibly more relevant) output of **top**, we can sort only the active processes to be displayed, by running **top -i**, and we can sort even further by CPU usage, by pressing Shift+P while running **top** (or by initially running **top -o %CPU**):

```
supervisor@rtbrick:~$ top -i
```

```
top - 23:55:20 up 1 day, 10:56,  0 users,  load average: 2.98, 2.87, 2.79
Tasks:  46 total,   1 running, 45 sleeping,   0 stopped,   0 zombie
%Cpu(s):  9.6 us,  6.5 sy,   0.0 ni, 83.7 id,   0.0 wa,   0.0 hi,   0.3 si,   0.0 st
KiB Mem : 32785636 total, 26168764 free, 4137340 used, 2479532 buff/cache
KiB Swap:      0 total,      0 free,      0 used. 27832552 avail Mem

  PID USER      PR  NI   VIRT   RES   SHR  S  %CPU  %MEM     TIME+ COMMAND
  260 root        20   0 10.564g 1.474g 177952 S 110.0   4.7   2475:13 vpp_main
   112 root        20   0  438592 140908 47112 S   2.0   0.4   39:40.10 igmp.iod.1
   129 root        20   0  399544 118640 44244 S   2.0   0.4   16:40.52 lldpd
   156 root        20   0  461888 134852 59328 S   2.0   0.4   41:22.55 subscriberd.1
   166 root        20   0  408076 117936 43416 S   2.0   0.4   39:39.87 pim.iod.1
   183 root        20   0  586944 144644 51256 S   2.0   0.4   41:42.46 bgp.iod.1
   108 root        20   0  406552 122028 46576 S   1.7   0.4   39:57.25 pppoe.1
   136 root        20   0  425212 147080 35636 S   1.7   0.4   24:43.47 resmond
   176 root        20   0  392036 114596 40312 S   1.7   0.3   40:23.35 l2tpd.1
   193 root        20   0 1453420 929224 93728 S   1.0   2.8   18:35.60 confd
   168 root        20   0  3424392 41132   9824 S   0.7   0.1 127:35.58 rtbrick-resmond
   125 root        20   0  434464 132772 50396 S   0.3   0.4    2:54.41 mribd
   215 root        20   0 1527800 12736   5952 S   0.3   0.0    0:10.43 rtbrick-restcon
   266 root        20   0  837180 107808 35424 S   0.3   0.3   19:30.23 prometheus
```

As with the example above, we can also filter by any column present in the task area.

If, for example, a process is hogged and starts consuming too much CPU or memory, thus preventing the good functioning of the system, **top** offers the option to kill the respective process: you can press "k" and enter the process ID of the process to be killed; in the example below, the operator will terminate the **cron** process (make sure to run **top** as root when terminating processes spawned with the root user):

```
top - 07:39:16 up 1 day, 18:40, 3 users, load average: 2.89, 2.90, 2.91
Tasks: 56 total, 2 running, 54 sleeping, 0 stopped, 0 zombie
%Cpu(s): 10.7 us, 7.5 sy, 0.0 ni, 81.7 id, 0.0 wa, 0.0 hi, 0.2 si, 0.0 st
KiB Mem : 32785636 total, 26042276 free, 4145480 used, 2597880 buff/cache
KiB Swap: 0 total, 0 free, 0 used. 27766808 avail Mem
PID to signal/kill [default pid = 260] 126
  PID USER      PR  NI   VIRT   RES   SHR  S  %CPU  %MEM     TIME+ COMMAND
 260 root        20   0 10.559g 1.471g 181376 R 106.2  4.7 174:41.75 vpp_main
12192 supervi+  20   0  39572   3564   3048 R   6.2   0.0   0:00.01 top
   1 root        20   0  77448   8740   6840 S   0.0   0.0   0:00.27 systemd
  21 root        19  -1  70268  12152  11476 S   0.0   0.0   0:00.37 systemd-journal
  33 root        20   0  42584   3992   2980 S   0.0   0.0   0:00.20 systemd-udev
  75 systemd+  20   0  71860   5388   4792 S   0.0   0.0   0:00.03 systemd-network
  81 systemd+  20   0  70640   5088   4532 S   0.0   0.0   0:00.05 systemd-resolve
 107 root        20   0 1604588 15864   8376 S   0.0   0.0   0:00.77 rtbrick-hostcon
 109 root        20   0  612252 189544  90092 S   0.0   0.6   0:10.33 etcd
 114 syslog      20   0  263036   4164   3652 S   0.0   0.0   0:00.10 rsyslogd
 117 root        20   0 408076 119448  43908 S   0.0   0.4   2:50.89 pim.ioc.1
 120 root        20   0  503648 151880  66984 S   0.0   0.5   0:11.60 ifmd
<...output omitted...>
```

Alternatively, **ps** can be used; **ps** is an utility for viewing information related with the processes on a system; it's abbreviated from "Process Status", and gets its information from /proc. It can be used in conjunction with tools like **top**, or standalone. Usually you would run **ps** after seeing a summary with **top**, for example. **ps** is useful to get more information about some specific process (for example the command - or arguments - a process is executed with). Normally **ps** is executed with one or more options, in order to obtain a meaningful output.

Common **ps** options

Name	Description
e	Show all processes
u	Select processes by effective user ID (EUID) or name
f	Full-format listing (there is also F - Extra full format)

Name	Description
L	Show threads

Some common example are:

- listing all running processes, detailed

```
supervisor@rtbrick:~$ ps -ef
UID          PID    PPID  C STIME TTY          TIME CMD
root           1        0  0 17:07 ?        00:00:00 /sbin/init
root          23         1  0 17:07 ?        00:00:00 /lib/systemd/systemd-journald
root          31         1  0 17:07 ?        00:00:00 /lib/systemd/systemd-udev
systemd+     53         1  0 17:07 ?        00:00:00 /lib/systemd/systemd-networkd
systemd+     94         1  0 17:07 ?        00:00:00 /lib/systemd/systemd-resolved
root        136         1  1 17:07 ?        00:03:46 /usr/local/bin/bd -i /etc/rtbrick/bd/config/lldpd.json
syslog      138         1  0 17:07 ?        00:00:00 /usr/sbin/rsyslogd -n
root        139         1  1 17:07 ?        00:06:53 /usr/local/bin/bd -i /etc/rtbrick/bd/config/pim_iod.json
root        142         1  1 17:07 ?        00:07:06 /usr/local/bin/bd -i /etc/rtbrick/bd/config/bgp_iod.json
root        145         1  0 17:07 ?        00:00:18 /usr/local/bin/bd -i /etc/rtbrick/bd/config/isis_appd.json
<...output omitted...>
```

- listing all running processes and threads

```
supervisor@rtbrick:~$ ps -eLf
UID          PID    PPID  LWP  C NLWP STIME TTY          TIME CMD
<...output omitted...>
root        136         1   136  1    1 17:07 ?        00:03:48 /usr/local/bin/bd -i
/etc/rtbrick/bd/config/lldpd.json
root        139         1   139  1    1 17:07 ?        00:06:56 /usr/local/bin/bd -i
/etc/rtbrick/bd/config/pim_iod.json
root        142         1   142  1    1 17:07 ?        00:07:09 /usr/local/bin/bd -i
/etc/rtbrick/bd/config/bgp_iod.json
root        145         1   145  0    1 17:07 ?        00:00:18 /usr/local/bin/bd -i
/etc/rtbrick/bd/config/isis_appd.json
root        147         1   147  1    1 17:07 ?        00:07:04 /usr/local/bin/bd -i
/etc/rtbrick/bd/config/isis_iod.json
<...output omitted...>
root        157         1   157  0    1 17:07 ?        00:00:18 /usr/local/bin/bd -i
/etc/rtbrick/bd/config/policy_server.json
root        160         1   160  0   19 17:07 ?        00:00:00 /usr/local/bin/rtbrick-hostconfd -proxy-onl-config
http://10.0.3.1:22022
root        160         1   202  0   19 17:07 ?        00:00:00 /usr/local/bin/rtbrick-hostconfd -proxy-onl-config
http://10.0.3.1:22022
root        160         1   203  0   19 17:07 ?        00:00:00 /usr/local/bin/rtbrick-hostconfd -proxy-onl-config
http://10.0.3.1:22022
<...output omitted...>
root        165         1   165  0    3 17:07 ?        00:00:18 /usr/bin/python3 /usr/local/bin/rtbrick-resmond-
agent
root        314         1   349  0   22 17:07 ?        00:00:01 /usr/local/bin/alertmanager
--config.file=/etc/prometheus/alertmanager.yml --storage.path=/var/db/alertmanager
root        314         1   366  0   22 17:07 ?        00:00:01 /usr/local/bin/alertmanager
--config.file=/etc/prometheus/alertmanager.yml --storage.path=/var/db/alertmanager
root        314         1   367  0   22 17:07 ?        00:00:01 /usr/local/bin/alertmanager
--config.file=/etc/prometheus/alertmanager.yml --storage.path=/var/db/alertmanager
<...output omitted...>
```

- listing all processes run by a user

```
supervisor@rtbrick:~$ ps -u syslog -f
UID          PID    PPID  C STIME TTY          TIME CMD
```

```
syslog      138      1  0 17:07 ?          00:00:00 /usr/sbin/rsyslogd -n
supervisor@rtbrick:~$
```

Along with **ps** you can use **pgrep** and **kill** to search, and then terminate a process:

```
supervisor@rtbrick:~$ pgrep -u root -a
1 /sbin/init
23 /lib/systemd/systemd-journald
31 /lib/systemd/systemd-udev
136 /usr/local/bin/bd -i /etc/rtbrick/bd/config/lldpd.json
139 /usr/local/bin/bd -i /etc/rtbrick/bd/config/pim_iod.json
142 /usr/local/bin/bd -i /etc/rtbrick/bd/config/bgp_iod.json
145 /usr/local/bin/bd -i /etc/rtbrick/bd/config/isis_appd.json
147 /usr/local/bin/bd -i /etc/rtbrick/bd/config/isis_iod.json
149 /usr/local/bin/bd -i /etc/rtbrick/bd/config/etcd.json
152 /usr/local/bin/bd -i /etc/rtbrick/bd/config/resmond.json
154 /usr/local/bin/bd -i /etc/rtbrick/bd/config/staticd.json
<...output omitted...>
314 /usr/local/bin/alertmanager --config.file=/etc/prometheus/alertmanager.yml
--storage.path=/var/db/alertmanager
316 /usr/local/bin/prometheus --config.file=/etc/prometheus/prometheus.yml --storage.tsdb.retention.time=5d
--storage.tsdb.path=/var/db/prometheus
<...output omitted...>
supervisor@rtbrick:~$ kill prometheus
```

2.6.2. Disk Space

Another issue that can affect the functioning of the system is the lack of disk space; in severe situations, the system will become unusable. From this standpoint, checking disk space is one of the first things you do when doing first troubleshooting steps.

On Linux-based systems there are two main tools to check disk space: **du** (disk usage) and **df** (disk free). As in the case with **ps** and **top**, it is important to understand the uses cases for the two, and how they can complement each other.



Normally, you would first use **df** to have a quick look of the overall system disk space, then you would use **du** to look deeper into the problem. This approach is due to how these two tools work: **df** reads the superblocks only and trusts it completely, while **du** traverses a directory and reads each object, then sums the values up. This means that, most of the times, there will be differences between the exact values reported by these two; you can say that **df** sacrifices accuracy for speed.

First, we can look at the total space on the switch (we run the command in RtBrick Host):

```
supervisor@5916-nbg1:~$ df -h
```

```

Filesystem      Size  Used Avail Use% Mounted on
devtmpfs        1.0M    0   1.0M   0% /dev
/dev/sdb7       113G   5.2G  102G   5% /
/dev/sdb6       2.0G   1.2G   677M  64% /mnt/host/images
/dev/sdb1       256M  252K  256M   1% /boot/efi
/dev/sdb4       120M   43M   69M   39% /mnt/host/boot
/dev/sdb5       120M   1.6M  110M   2% /mnt/host/config
tmpfs           3.2G   720K   3.2G   1% /run
tmpfs           5.0M    0   5.0M   0% /run/lock
tmpfs           6.3G    0   6.3G   0% /run/shm
cgroup          12K    0   12K   0% /sys/fs/cgroup
tmpfs           6.0G  546M   5.5G   9% /shm
supervisor@5916-nbg1:~$

```

We then verify container disk space, by looking at the general snapshot of the system:

```

supervisor@rtbrick:~$ df -h
Filesystem
Size  Used Avail Use% Mounted on
/var/cache/rtbrick/imagestores/847c6ecd-df58-462e-a447-38c620a12fe1/rbfs-cont/rbfs-accessleaf-qmx-20.10.0-g4internal.20201103065150+Bmvpn.C1067d22e/rootfs 113G  5.1G  102G   5% /
none
492K    0  492K   0% /dev
/dev/sdb7
113G  5.1G  102G   5% /var/log
tmpfs
6.0G  546M  5.5G   9% /shm
devtmpfs
1.0M    0   1.0M   0% /dev/mem
tmpfs
16G   4.3M   16G   1% /dev/shm
tmpfs
16G   9.0M   16G   1% /run
tmpfs
5.0M    0   5.0M   0% /run/lock
tmpfs
16G    0   16G   0% /sys/fs/cgroup
tmpfs
3.2G    0   3.2G   0% /run/user/1000
supervisor@rtbrick:~$

```

At a quick glance we can see here that the root partition has a 5% usage, from a total of 113GB. You will also notice that `/dev/sdb7` in the container has the same values as the output reported in RtBrick Host. It also has the same total size and same used space as the root filesystem. Notice the usage of the `-h` flag, which makes the output easier to read ("human readable").

Then you can verify the details of a specific directory, let's say you want too see how much disk space is used by user files in `/usr`:

```

supervisor@rtbrick:~$ ls -l /usr/
total 44
drwxr-xr-x  1 root root 4096 Nov  3 11:54 bin
drwxr-xr-x  2 root root 4096 Apr 24  2018 games
drwxr-xr-x 37 root root 4096 Nov  3 06:59 include
drwxr-xr-x  1 root root 4096 Nov  3 11:54 lib

```

```
drwxr-xr-x 1 root root 4096 Nov  3 06:57 local
drwxr-xr-x 2 root root 4096 Nov  3 06:59 sbin
drwxr-xr-x 1 root root 4096 Nov  3 11:54 share
drwxr-xr-x 2 root root 4096 Apr 24 2018 src
supervisor@rtbrick:~$ du -sh /usr/
2.6G    /usr/
supervisor@rtbrick:~$ ls -l /usr
total 44
drwxr-xr-x 1 root root 4096 Nov  3 11:54 bin
drwxr-xr-x 2 root root 4096 Apr 24 2018 games
drwxr-xr-x 37 root root 4096 Nov  3 06:59 include
drwxr-xr-x 1 root root 4096 Nov  3 11:54 lib
drwxr-xr-x 1 root root 4096 Nov  3 06:57 local
drwxr-xr-x 2 root root 4096 Nov  3 06:59 sbin
drwxr-xr-x 1 root root 4096 Nov  3 11:54 share
drwxr-xr-x 2 root root 4096 Apr 24 2018 src
```

We then go even deeper, to check what takes most space in the `/usr` directory

```
supervisor@rtbrick:~$ du -h /usr/ | sort -rh | head -5
2.6G    /usr/
1.8G    /usr/local
1.7G    /usr/local/lib
506M    /usr/lib
169M    /usr/share
```

We used `du` in conjunction with `sort` (options `r` - reverse the result -, and `h` - compare human readable numbers -), as well as with `head`, to get only the biggest 5 directories from the output.

3. Physical Layer

3.1. Link Failures

Link failures are one of the most common issues. First, verify the status of the interface using one of the following show commands:

```
supervisor@rtbrick: op> show interface summary
supervisor@rtbrick: op> show interface <ifp-name>
```

The administrative, link, and operational status should be "Up". Depending on your configuration, logical interfaces should have been created and IP addresses should be assigned like in this example:

```
supervisor@rtbrick: op> show interface ifp-0/0/52
```

Interface	Admin	Link	Oper	IPv4 Address	IPv6 Address
ifp-0/0/52	Up	Up	Up		
ifl-0/0/52/13	Up	Up	Up	-	
fe80::ba6a:97ff:fea5:923d/128					

Verify further details of the interface using the 'detail' version of the show command:

```
supervisor@rtbrick: op> show interface ifp-0/0/52 detail
Interface:ifp-0/0/52
Admin/Link/Operational status: Up/Up/Up
Speed configured: 100G
Speed maximum: 100G
Duplex: Full
Autonegotiation: Disabled
Encapsulation mode: ieee
MTU: 16360
Maximum frame size: 16360
Interface type: ethernet
Interface index: 124929
MAC: b8:6a:97:a5:92:3d
Uptime: Mon Nov 23 14:18:46 GMT +0000 2020
Description: Physical interface #52 from node 0, chip 0
Packet statistics:
  Rx packets: 263892      Tx packets: 280356
  Rx bytes: 23377027     Tx bytes: 154437883
Interface: ifl-0/0/52/13, Instance: default
Admin/Link/Operational status: Up/Up/Up
IPv4/IPv6/MPLS Status: Up/Up/Up
IPv4/IPv6/MPLS MTU: 1500/1500/1500
Interface type: Logical Sub interface
Interface index: 106497
MAC: b8:6a:97:a5:92:3d
IPv4 Address      IPv6 Address
-                 fe80::ba6a:97ff:fea5:923d/128
```

Packet statistics:

Ingress forwarded packets: 262991
 Ingress drop Packets: 0
 Egress forwarded packets: 15490
 Egress drop packets: 0

Ingress forwarded bytes: 23313212
 Ingress drop bytes: 0
 Egress forwarded bytes: 3063609
 Egress drop bytes: 0

Next, verify the interface statistics. These will show common link errors:

```
supervisor@rtbrick: op> show interface <ifp-name> statistics
```

You can also inspect the following BDS tables for even more detailed information:

```
supervisor@rtbrick: op> show datastore ifmd table global.interface.physical
supervisor@rtbrick: op> show datastore ifmd table global.interface.logical
supervisor@rtbrick: op> show datastore ifmd table global.interface.address
supervisor@rtbrick: op> show datastore fibd table local.bcm.qmx.port
```

Identify the type of optics and check the optics data:

```
supervisor@rtbrick: op> show optics inventory
supervisor@rtbrick: op> show optics interface <ifp-name>
```

The output of the 'show optics' command will display the Tx and Rx levels like in the following example. In addition, particularly check for warnings or alarms. These will typically indicate the cause of the issue. Please note the 'show optics' command does not work for passive Direct Attach Cable (DAC).

```
supervisor@rtbrick: op> show optics interface ifp-0/0/52
Physical Interface: ifp-0/0/52
  Lane Id                : 1
  Laser bias current      : 85.100 mA
  Laser tx power          : 1.1107 mW / 0.46 dBm
  Laser rx power          : 0.5521 mW / -2.58 dBm
  Module temperature      : 30.41 degree celsius
  Module voltage          : 3.199 V
  TX disable              : false
  High power class enable : true
  Laser TX loss of signal : false
  Laser TX loss of lock   : false
  Laser RX loss of signal : false
  Laser RX loss of lock   : false
  <...>
```

You can also show detailed optics information using the BDS tables:

```
supervisor@rtbrick: op> show datastore resmond table global.chassis_0.resource.optics.inventory
supervisor@rtbrick: op> show datastore resmond table global.chassis_0.resource.optics.module
```

If there are continuous or reoccurring interface issues like interface flapping, enable logging for the ifm module and inspect the log table as described in the [Logging](#) section.

3.2. Hardware Failures

If you suspect a hardware failure or issue, verify sensor information available at the RFBS container layer. Please note this section applies to hardware switches only. Sensor information is not available on virtual deployments.

```
supervisor@rtbrick: op> show sensor system-led
supervisor@rtbrick: op> show sensor power-supply
supervisor@rtbrick: op> show sensor fan
supervisor@rtbrick: op> show sensor temperature
```

The sensor information might show hardware failures like in this example:

```
supervisor@rtbrick: op> show sensor power-supply
```

Name	Current In	Current Out	Voltage In	Voltage Out	Power In	Power Out	Status
PSU-1	0 mA	11593 mA	0 mV	11984 mV	0 mW	139000 mW	PRESENT
PSU-2	0 mA	0 mA	0 mV	0 mV	0 mW	0 mW	PRESENT, FAILED

Next, verify the status of the hardware at the RtBrick Host layer:

```
supervisor@spine1:~# sudo onlpdump
```



Due to a known issue, the 'sudo onlpdump' command does not work in the current release for the user supervisor. As a workaround switch to user root using 'sudo -i' and then enter the 'onlpdump' command.

The onlpdump tool provides detailed information about the system and its components, and might show hardware failures like in the following example:

```
supervisor@spine1:~# sudo onlpdump
<...>
psu @ 1 = {
  Description: PSU-1
  Model:      NULL
  SN:         NULL
  Status: 0x00000003 [ PRESENT, FAILED ]
  Caps:      0x00000000
  Vin:       0
  Vout:      0
  Iin:       0
```

```
Iout: 0
Pin: 0
Pout: 0
}
```

If you have identified or suspect an optics issue, verify the status of the optics at the RtBrick Host layer. The `onlpdump -S` tool will show the type of optic installed:

```
supervisor@spine1:~# sudo onlpdump -S
Port  Type           Media  Status  Len  Vendor           Model           S/N
-----
0     NONE
<...>
52    100GBASE-CR4    Copper      3m    Fiberstore      QSFP28-100G-DAC  I2706060007
<...>
```

The following example shows an optic failure:

```
supervisor @localhost:~# sudo onlpdump -S
Port  Type           Media  Status  Len  Vendor           Model           S/N
-----
<...>
06-27 08:27:49.823107 [x86_64_accton_as5916_54xk] Unable to read eeprom from port(51), size is different!
51    Error E_INTERNAL
```

4. Application Layer

4.1. Fabric Operation

4.1.1. Fabric Protocols

Verify L2 connectivity using LLDP. LLDP allows to quickly verify the topology and connectivity between your devices:

```
supervisor@rtbrick>LEAF01: op> show lldp neighbor
```

Neighbor name	Status	Remote port ID	Local port ID	Neighbor MAC address	Last received	Last sent
spine2	Up	memif-0/1/1	memif-0/1/1	7a:52:68:60:01:01	0:00:11 ago	
0:00:12 ago						
spine2	Up	memif-0/1/2	memif-0/1/2	7a:52:68:60:01:02	0:00:06 ago	
0:00:09 ago						
leaf1	Up	memif-0/1/1	memif-0/2/1	7a:47:fc:60:01:01	0:00:07 ago	
0:00:10 ago						
leaf2	Up	memif-0/1/1	memif-0/2/2	7a:28:3b:60:01:01	0:00:13 ago	
0:00:14 ago						

Verify IPv6 neighbor discovery:

```
supervisor@rtbrick>LEAF01: op> show neighbor ipv6
```

Instance	MAC Address	Interface	IP Address	Dynamic	Entry
Time					
default	7a:52:68:60:01:01	memif-0/1/1/1	fd3d:3d:100:a::2	true	Wed Nov
18 18:33:28					
default	7a:52:68:60:01:01	memif-0/1/1/1	fe80::7852:68ff:fe60:101	true	Wed Nov
18 18:32:30					
default	7a:52:68:60:01:02	memif-0/1/2/1	fe80::7852:68ff:fe60:102	true	Wed Nov
18 18:32:30					
default	7a:47:fc:60:01:01	memif-0/2/1/1	fe80::7847:fcff:fe60:101	true	Wed Nov
18 18:32:32					
default	7a:28:3b:60:01:01	memif-0/2/2/1	fe80::7828:3bff:fe60:101	true	Fri Nov
20 14:23:27					

If there is no LLDP peer or no IPv6 neighbor discovered on an interface, it typically indicates a connectivity issue. BGPv6 peers cannot be established. At this point, proceed with the following steps:

- Verify the interface as described in the [Link Failures](#) section.
- Verify connectivity to the neighbor using Ping as described in the [Fabric Connectivity](#) section.
- Check the running configuration for the fabric interfaces.

If IPv6 neighbors have been discovered, verify the BGP sessions. BGP peers should have been auto-discovered on all fabric interfaces. If a BGP session is operational,

it will be in "Established" state. The "PfxRcvd" and "PfxSent" show that BGP routes are exchanged:

```
supervisor@rtbrick>LEAF01: op> show bgp peer
Instance name: default
Peer          Remote AS    State      Up/Down Time      PfxRcvd
PfxSent
leaf1         4200000201   Established 4d:17h:00m:27s    4
14
spine2        4200000100   Established 0d:00h:05m:11s    8
14
```

If IPv6 neighbors have been discovered, but BGP sessions are not established, perform the following steps:

- Inspect the output of the 'show bgp peer detail' command.
- Check the BGP running configuration.
- Enable and verify BDS logging for bgp.iod and the BGP module as described in the [Logging](#) section.

If BGP sessions are established and routes are being exchanged, BGP will typically be fully operational. Next, verify BGP routes for IPv6 unicast and IPv6 labeled unicast:

```
supervisor@rtbrick>LEAF01: op> show bgp rib-local ipv6 unicast
supervisor@rtbrick>LEAF01: op> @spine1: op> show bgp rib-local ipv6 labeled-
unicast
```

If you have multiple instances with a high number of routes, you can optionally filter the output using the 'instance default' command option. For both IPv6 and IPv6 LU, there should be one or multiple route(s) for each of the spine and leaf IPv6 loopback addresses like in this example:

```
supervisor@rtbrick>LEAF01: op> show bgp rib-local ipv6 unicast
Instance: default, AFI: ipv6, SAFI: unicast
Prefix          Snd-Path-ID    Rcv-Path-ID    Peer          Next-
Hop            Up Time
fd3d:3d:0:99::1/128    513421047      2              ::
0d:00h:00m:48s
fd3d:3d:0:99::2/128    748525752      0              fe80::7852:68ff:fe60:101
fe80::7852:68ff:fe60:101    0d:00h:00m:36s
fd3d:3d:0:99::3/128    30278035       0              fe80::7847:fcff:fe60:101
fe80::7847:fcff:fe60:101    0d:00h:00m:36s
fd3d:3d:0:99::4/128    748525752      0              fe80::7852:68ff:fe60:101
fe80::7852:68ff:fe60:101    0d:00h:00m:36s
```

4.1.2. Transport-layer Routing

The BGP routes described above are subscribed by ribd. ribd will select the best routes from multiple sources and add them to the actual routing table. In this guide we refer to the connectivity between the fabric devices as transport-layer, as opposed to the service-layer connectivity in the VPNs which are deployed on top.

Verify the IPv6 unicast and IPv6 labeled unicast routing tables. Same like for the BGP commands, you can optionally filter the output using the 'instance default' command option:

```
supervisor@rtbrick>LEAF01: op> show route ipv6 unicast
supervisor@rtbrick>LEAF01: op> show route ipv6 labeled-unicast
```

For both IPv6 and IPv6 LU, there should be one or multiple route(s) for each of the spine and leaf IPv6 loopback addresses, each with a valid IPv6 nexthop address and exit interface. Assuming you are using BGPv6 as a fabric protocol, i.e. no additional protocols like IS-IS in the default instance, these will be BGP routes only. If all expected routes exist, it typically indicates that the fabric is working fine from a control-plane perspective.

4.1.3. Fabric Connectivity

In order to troubleshoot data-plane issues, you can verify connectivity using the RBFS ping tool. First, verify connectivity to the auto-discovered link-local neighbors. Specify the interface on which the neighbor has been discovered as the source interface. Example:

```
supervisor@rtbrick>LEAF01: op> show neighbor ipv6
Instance      MAC Address      Interface      IP Address      Dynamic  Entry
Time
default       7a:52:68:60:01:01 memif-0/1/1/1  fe80::7852:68ff:fe60:101 true      Wed Nov
18 18:32:30
<...>

supervisor@rtbrick>LEAF01: op> ping fe80::7852:68ff:fe60:101 source-interface memif-0/1/1/1
68 bytes from fe80::7852:68ff:fe60:101: icmp_seq=1 ttl=63 time=8.6318 ms
<...>
Statistics: 5 sent, 5 received, 0% packet loss
```

Second, verify connectivity to the spine and leaf loopback addresses learned via BGP. As a source address that is advertised via BGP in the default instance, so that it is reachable from the remote device. This depends on your deployment, but typically it is the loopback interface in the default instance. Example:

```

supervisor@rtbrick>LEAF01: op> show route ipv6 unicast
Instance: default, AFI: ipv6, SAFI: unicast
Prefix/Label                Source                Pref    Next Hop
Interface
fd3d:3d:0:99::1/128          direct                0        fd3d:3d:0:99::1
lo-0/0/0/1
fd3d:3d:0:99::3/128          bgp                   20
fe80::7847:fcff:fe60:101     memif-0/2/1/1
fd3d:3d:0:99::4/128          bgp                   200
<...>

supervisor@rtbrick>LEAF01: op> ping fd3d:3d:0:99::3 source-interface lo-0/0/0/1
68 bytes from fd3d:3d:0:99::3: icmp_seq=1 ttl=63 time=10.0001 ms
<...>

```

Next, verify MPLS connectivity by specifying IPv6 LU with the ping tool. Example:

```

supervisor@rtbrick>LEAF01: op> ping fd3d:3d:0:99::3 instance default afi ipv6 safi
labeled-unicast source-interface lo-0/0/0/1
68 bytes from fd3d:3d:0:99::3: icmp_seq=1 ttl=63 time=2.8520 ms
<...>

```

If the fabric connectivity is broken, use the RBFS traceroute tool to narrow down the location of the issue. Same as for ping, you need to use a source address that is advertised via BGP in the default instance and reachable from the remote device. Example:

```

supervisor@rtbrick>LEAF01: op> traceroute fd3d:3d:0:99::4 source-interface lo-0/0/0/1
traceroute to fd3d:3d:0:99::4 30 hops max, 60 byte packets
1  fd3d:3d:100:a::2    13.270 ms    4.973 ms    6.294 ms
2  fd3d:3d:0:99::4    18.825 ms    17.058 ms    17.764 ms

```

4.2. Subscriber Services

The term subscriber describes an access user or session from a higher level decoupled from underlying protocols like PPPoE or IPoE. Subscribers in RBFS can be managed locally or remote via RADIUS. Each subscriber is uniquely identified by a 64bit number called subscriber-id.

4.2.1. Subscriber Sessions

A good starting point for troubleshooting subscriber services is to verify the status of the subscriber sessions. If a session is fully operational, its state will be ESTABLISHED like in the following example:

```

supervisor@rtbrick>LEAF01: op> show subscriber
Subscriber-Id      Interface      VLAN      Type      State
72339069014638600 ifp-0/0/1      1:1       PPPoE     ESTABLISHED
72339069014638601 ifp-0/0/1      1:2       PPPoE     ESTABLISHED
72339069014638602 ifp-0/0/1      1:3       PPPoE     ESTABLISHED
72339069014638603 ifp-0/0/3      2000:7     L2TP     ESTABLISHED

```

Alternative use **show subscriber detail** which shows further details like username, Agent-Remote-Id (aka Line-Id) or Agent-Circuit-Id if screen width is large enough to print all those information. The following table describes all possible subscriber session states:

State	Description
INIT	Initial subscriber state.
AUTHENTICATING	The subscriber is waiting for authentication response.
AUTH ACCEPTED	Authentication is accepted.
AUTH REJECTED	Authentication failed.
TUNNEL SETUP	Subscriber is tunnelled via L2TPv2 waiting for L2TP session setup completed.
ADDRESS ALLOCATED	IP addresses allocated.
ADDRESS REJECTED	IP addresses rejected (pool exhaust, duplicate or wrong addresses).
FULL	Subscriber forwarding state established.
ACCOUNTING	Subscriber accounting started sending RADIUS Accounting-Request-Start.
ESTABLISHED	The subscriber becomes ESTABLISHED after response to RADIUS Accounting-Request-Start if RADIUS accounting is enabled otherwise immediately after FULL.
TERMINATING	The subscriber is terminating and remains in this state until response to RADIUS Accounting-Request-Start if RADIUS accounting is enabled

Further details per subscriber can be shown with the following commands.

```

supervisor@rtbrick>LEAF01: op> show subscriber 72339069014638600
<cr>
access-line      Subscriber access line information

```

accounting	Subscriber accounting information
acl	Subscriber ACL information (filter)
detail	Detailed subscriber information
qos	Subscriber QoS information

If a subscriber has been torn down or is not able to setup, inspect the terminate history which indicates the teardown reason.

If a previously working subscriber session has been torn down, inspect the termination history which tells the actual reason.

```
supervisor@rtbrick>LEAF01: op> show subscriber history
```

Subscriber-Id	Timestamp	Terminate Code
72339069014638594	Tue Nov 17 08:13:17 GMT +0000 2020	PPPoE LCP Terminate Request Received
72339069014638595	Tue Nov 17 08:13:17 GMT +0000 2020	PPPoE LCP Terminate Request Received
72339069014638596	Tue Nov 17 08:13:17 GMT +0000 2020	PPPoE LCP Terminate Request Received
72339069014638597	Tue Nov 17 08:13:17 GMT +0000 2020	PPPoE LCP Terminate Request Received
72339069014638598	Tue Nov 17 08:13:17 GMT +0000 2020	PPPoE LCP Terminate Request Received
72339069014638599	Tue Nov 17 08:13:46 GMT +0000 2020	L2TP CDN Request
72339069014638600	Tue Nov 17 08:39:01 GMT +0000 2020	PPPoE Clear Session

This command shows also further information like interface, VLAN and MAC address if screen is width enough.

Optionally you can view even more detailed information by inspecting the following key BDS tables used for subscriber management:

- Subscriber table – main table including all subscribers with all states and parameters:

```
supervisor@rtbrick>LEAF01: op> show datastore subscriberd.1 table
local.access.subscriber
```

- Subscriber interface table:

```
supervisor@rtbrick>LEAF01: op> show datastore subscriberd.1 table
global.access.1.subscriber.ifl
```

- Subscriber termination history table:

```
supervisor@rtbrick>LEAF01: op> show datastore subscriberd.1 table
local.access.subscriber.terminate.history
```

4.2.2. RADIUS

Remote Authentication Dial-In User Service (RADIUS) is a networking protocol that provides centralized Authentication, Authorization and Accounting (AAA) management for all types of subscribers (PPPoE or IPoE). RADIUS servers can perform as authentication and accounting servers or change of authorization (CoA) clients. Authentication servers maintain authentication records for subscribers.

The subscriber daemon requests authentication in RADIUS access-request messages before permitting subscribers access. Accounting servers handle accounting records for subscribers. The subscriber daemon transmits RADIUS accounting-start, interim and stop messages to the servers. Accounting is the process of tracking subscriber activity and network resource usage in a subscriber session. This includes the session time called time accounting and the number of packets and bytes transmitted during the session called volume accounting. A RADIUS server can behave as a change of authorization (CoA) client allowing dynamic changes for subscriber sessions. The subscriber daemon supports both RADIUS CoA messages and disconnect messages. CoA messages can modify the characteristics of existing subscriber sessions without loss of service, disconnect messages can terminate subscriber sessions.

RBFS supports multiple RADIUS servers for high availability and scaling which are bundled using RADIUS profiles. The status of those profiles can be shown with the following command.

```
supervisor@rtbrick>LEAF01: op> show radius profile
RADIUS Profile: radius-default
  NAS-Identifier: BNG
  NAS-Port-Type: Ethernet
  Authentication:
    Algorithm: ROUND-ROBIN
    Server:
      radius-server-1
      radius-server-2
  Accounting:
    State: UP
    Stop on Reject: True
    Stop on Failure: True
    Backup: True
    Algorithm: ROUND-ROBIN
    Server:
      radius-server-1
      radius-server-2
```

The profile accounting state becomes immediately ACTIVE if at least one of the

referenced RADIUS accounting servers is enabled for accounting. Otherwise the profile keeps **DISABLED** which may indicate a wrong configuration.

If RADIUS Accounting-On is enabled, the profile state becomes STARTING before UP. It is not permitted to send any accounting request start, interim or stop related to a profile in this state. It is also not permitted to send authentication requests if accounting-on-wait is configured in addition. The state becomes UP if at least one server in the accounting server list is in a state UP or higher.

A new profile added which references existing used RADIUS servers must not trigger a RADIUS Accounting-On request if at least one of the referenced servers is in a state of UP or higher.

The state of the RADIUS servers is shown with the following commands.

```
supervisor@rtbrick>LEAF01: op> show radius server
RADIUS Server      Address      Authentication State Accounting State
radius-server-1    100.0.0.1    UP           UP
radius-server-2    100.0.0.3    ACTIVE       ACTIVE
radius-server-3    100.0.0.4    ACTIVE       ACTIVE
```

The following table explains the meaning of the different state where some of those state are applicable for accounting only.

State	Description
DISABLED	RADIUS authentication (authentication_state) or accounting (accounting-state) is disabled or server not referenced by profile.
ACTIVE	Server referenced by RADIUS profile but no valid response received.
STARTING	This state is valid for accounting (accounting-state) only during accounting-on is sending (wait for accounting-on response).
STOPPING	This state is valid for accounting (accounting-state) only during accounting-off is sending (wait for accounting-off response).
FAILED	This state is valid for accounting (accounting-state) only if accounting-on/off timeout occurs.
UP	Valid RADIUS response received
UNREACHABLE	No response received/timeout but server is still usable.
DOWN	Server is down but can be selected.

State	Description
TESTING	Send a request to test if server is back again. The server will not be selected for another request in this state (use a single request to check if server is back again).
DEAD	Server is down and should not be selected.

Alternative use `show radius server <radius-server>` for further details and statistics per RADIUS server. Those statics can be cleared with `clear radius server-statistics` without any service impact.

4.2.3. PPPoE Sessions

For PPPoE sessions the state should be ESTABLISHED if local terminated or TUNNELLED for L2TPv2 tunnelled sessions.

```
supervisor@rtbrick>LEAF01: op> show pppoe session
Subscriber-Id      Interface      VLAN      MAC      State
72339069014638604  ifp-0/0/1     1:1       00:04:0e:00:00:01 ESTABLISHED
72339069014638601  ifp-0/0/1     1:2       00:04:0e:00:00:02 ESTABLISHED
72339069014638602  ifp-0/0/1     1:3       00:04:0e:00:00:03 ESTABLISHED
72339069014638603  ifp-0/0/3     2000:7    52:54:00:57:c8:29 TUNNELLED
```

Alternative use `show pppoe session detail` which shows further details like username, Agent-Remote-Id (aka Line-Id) or Agent-Circuit-Id if screen width is large enough to print all those information.

State	Description
LINKING	PPP LCP setup.
AUTHENTICATING	PPP authentication (PAP or CHAP).
NETWORKING	PPP IPCP (IPv4) and IP6CP (IPv6) setup.
ESTABLISHED	The PPPoE session becomes established if at least one NCP (IPCP or IP6CP) is established (state OPEN).
TUNNELLED	This state indicates that a PPPoE session is tunnelled via L2TPv2.
TERMINATING	PPP session teardown.
TERMINATED	PPPoE session terminated.

If PPPoE session remain in state TERMINATED, the subscriber state should be

checked. Typically this happens if RADIUS Accounting-Request-Stop is still pending.

Further details per PPPoE session can be shown with the following commands.

```
supervisor@rtbrick>LEAF01: op> show pppoe session 72339069014638601
<cr>
  detail          Detailed session information
  statistics      Protocol statistics
```

The detail command shows the states of the session and all sub-protocols with extensive information and negotiated parameters.

Session statistics are available global and per session.

```
supervisor@rtbrick>LEAF01: op> show pppoe session statistics
supervisor@rtbrick>LEAF01: op> show pppoe session 72339069014638601 statistics
```

The PPPoE discovery statistics are helpful if session setup fails in initial PPPoE tunnel setup before actual PPP negotiation is starting.

```
supervisor@rtbrick>LEAF01: op> show pppoe discovery packets
Packet      Received      Sent
PADI        17             0
PADO        0             17
PADR        17             0
PADS        0             17
PADT        1             13

supervisor@rtbrick>LEAF01: op> show pppoe discovery errors
PADI Drop No Config          : 0
PADI Drop Session Protection : 0
PADI Drop Session Limit     : 0
PADI Drop Dup Session       : 0
PADI Drop Interface Down    : 0
PADR Drop No Config          : 0
PADR Drop Wrong MAC         : 0
PADR Drop Interface Down    : 0
PADR Drop Session Limit     : 0
PADR Drop Session Protection : 0
PADR Drop Bad Cookie        : 0
PADR Drop Bad Session       : 0
PADR Drop Dup Session       : 0
PADR Drop No mapping Id     : 0
PADT Drop No Session        : 0
PADT Drop Wrong MAC         : 0
PADX Interface Get Failure   : 0
```

If PPPoE session protection is enabled in access configuration profile, short lived or failed sessions will be logged in the PPPoE session protection table

(local.pppoe.session.protection).

Every session not established for at least 60 seconds per default is considered as failed or short lived session. This will block new sessions on this IFP and VLANs for one second per default which increase exponential with any further failed session until the max time of per default 300 seconds is reached. The interval is reset after 900 seconds without failed sessions.

The PPPoE session protection table include also last subscriber-id and terminate code which indicates the reason for session failures.

```
supervisor@rtbrick>LEAF01: op> show pppoe discovery protection
Interface      VLAN      Status Attempts   Last Terminate Code
ifp-0/0/1      1:1       OK         1           PPPoE LCP Terminate Request Received
ifp-0/0/1      1:2       OK         1           PPPoE LCP Terminate Request Received
ifp-0/0/1      1:3       OK         1           PPPoE LCP Terminate Request Received
```

If status OK indicates that new session are accepted where BLOCKED means that sessions will be rejected.

4.2.4. L2TP Sessions

For L2TPv2 tunnelled PPPoE sessions the global unique subscriber-id can be used to get information about the L2TP session.

```
supervisor@rtbrick>LEAF01: op> show l2tp subscriber 72339069014638621
Subscriber-Id: 72339069014638621
State: ESTABLISHED
Local TID: 45880
Local SID: 39503
Peer TID: 1
Peer SID: 1
Call Serial Number: 10
TX Speed: 10007000 bps
RX Speed: 1007000 bps
CSUN: disabled
```

The following command gives a good overview over the corresponding tunnels.

```
supervisor@rtbrick>LEAF01: op> show l2tp tunnel sessions
Role Local TID Peer TID State Preference Sessions Established Peer Name
LAC      2022      1 ESTABLISHED      10000      1      1 LNS3
LAC      3274      1 ESTABLISHED      10000      1      1 LNS8
LAC     14690      1 ESTABLISHED      10000      1      1 LNS6
LAC     29489      1 ESTABLISHED      10000      1      1 LNS9
LAC     33323      1 ESTABLISHED      10000      1      1 LNS4
LAC     35657      1 ESTABLISHED      10000      1      1 LNS10
```

LAC	37975	1	ESTABLISHED	10000	1	1	LNS1
LAC	45880	1	ESTABLISHED	10000	1	1	LNS7
LAC	46559	1	ESTABLISHED	10000	1	1	LNS2
LAC	58154	1	ESTABLISHED	10000	1	1	LNS5

Detailed information per tunnel are available via `show l2tp tunnel <TID> detail`.

L2TP tunnel statistics are available global and per tunnel.

```
supervisor@rtbrick>LEAF01: op> show l2tp tunnel statistics
supervisor@rtbrick>LEAF01: op> show l2tp tunnel 37975 statistics
```

4.2.5. Service-Layer Connectivity

A different type of issues can occur if a subscriber has successfully connected to a leaf switch, but does not have connectivity to his services, for example connecting to the Internet. The actual user traffic is carried in a VPN across the RBFS fabric. First, verify the VPN routing table on both the spine and the leaf switches. Depending on your design, there will be specific routes and/or a default route only:

```
supervisor@rtbrick>LEAF01: op> show route ipv4 unicast instance services
Instance: services, AFI: ipv4, SAFI: unicast
Prefix/Label          Source      Pref    Next Hop          Interface
192.168.0.3/32        direct     0       192.168.0.3       lo-0/0/0/2
192.168.0.4/32        bgp        20      fd3d:3d:0:99::4   memif-0/1/1/1
<...>
```

If routes are missing already on the spine switch, there might be a routing issue between the spine and the upstream core routers or route reflectors. Further troubleshooting steps will depend on how the fabric is connected to the upstream network in your deployment. If all expected routes exists on the spine switch, but are missing on the leaf switch, verify the VPN route exchange between them. Example for verifying VPN routes advertised by the spine switch:

```
supervisor@rtbrick>LEAF01: op> show bgp rib-out ipv4 vpn-unicast peer leaf1
Instance: default, AFI: ipv4, SAFI: vpn-unicast
Peer: leaf1, Sent routes: 2
Prefix          MED    LocalPref  Origin    Next Hop          AS Path
192.168.0.3/32  0      -          Incomplete fd3d:3d:0:99::3  4200000100,
4200000201
192.168.0.4/32  1      -          Incomplete fd3d:3d:0:99::4  4200000100,
4200000202
<...>
```

Example for verifying VPN routes received by the leaf switch:

```
supervisor@rtbrick>LEAF01: op> show bgp rib-in ipv4 vpn-unicast peer spine1
Instance: default, AFI: ipv4, SAFI: vpn-unicast
Peer: spine1, Received routes: 1
  Prefix          Path ID  Next Hop          MED    LocalPref  AS Path
  192.168.0.4/32   0        fd3d:3d:0:99::4   1      -          42000000100,
42000000202
```

If you have a publicly routed loopback address in the services VPN, you can verify the connectivity to any well-known destination address using the RBFS Ping tool within the VPN instance:

```
supervisor@rtbrick>LEAF01: op> ping 8.8.8.8 instance services source-interface lo-0/0/1/0
68 bytes from 8.8.8.8: icmp_seq=1 ttl=63 time=21.6622 ms
<...>
Statistics: 5 sent, 5 received, 0% packet loss
```

If there is no connectivity to the IP address of your service, verify connectivity across the fabric within the instance by sending a ping between two leaf switches. This will indicate if the connectivity problem lies in the spine/leaf fabric or in the upstream network:

```
supervisor@rtbrick>LEAF01: op> ping 192.168.21.5 instance services source-interface lo-0/0/1/0
68 bytes from 192.168.21.5: icmp_seq=1 ttl=63 time=1.5511 ms
<...>
Statistics: 5 sent, 5 received, 0% packet loss
```

4.3. Host Path Capturing

You can use the RBFS built-in capture tool to verify and troubleshoot fabric as well as services protocol operation. It captures and displays all host-path traffic, that is control-plane packets sent to the CPU. It does not apply to transit traffic. This section explains the options available of the capturing tool to troubleshoot host path issues.

4.3.1. Physical Interface

You can capture all host path packets on a physical interface, including all sub-interfaces, by specifying the physical interface (IFP) name with the capture command.

capture interface <physical-interface-name> **direction** <dir>

Example

```
capture interface ifp-0/0/52 direction both
```

 To access the Operational State API that corresponds to this CLI, click [here](#).

4.3.2. Logical Interface

If you specify a logical interface (IFL) name with the capture command, the traffic on that sub-interface will be captured only. This allows to filter for example on a specific VLAN.

capture interface <logical-interface-name> **direction** <dir>

Example

```
capture interface ifl-0/0/52/1 direction both
```

4.3.3. Shared Memory Interface

There is no BDS packet table in fibd. Instead there is a pseudo network interface of the form shm-0/0/<trap-id>, where the trap ID identifies the protocol (BGP, ISIS, PPPoE, L2TP, RADIUS). You can use the VPP internal command **show rtb-shm** to find the mapping of protocol to trap ID. This command captures the packet exchanges between fibd and other protocol daemons.

capture interface <shm-interface-name> **direction** <dir>

Example

```
capture interface shm-0/0/1 direction both
```

4.3.4. ACL-based Packet Capturing

You can use an ACL to more granularly define the traffic to be captured.

capture acl <acl-name> **direction** <direction> **interface** <interface> <options>

Option	Description
<acl-name>	ACL name.
<direction>	Direction of the packet. The supported values are: in , out , or both .
<interface>	Specifies the interface that is used to capture packets onto console. For ACL-based packet capturing, the interface is mandatory.
file <filename> start	You can use this option to save the packets in the PCAP file and later use a tool like Wireshark to analyse the captured traffic
raw	Raw packet capture

Example

```
{
  "rtbrick-config:acl": {
    "l3v6": {
      "rule": [
        {
          "rule-name": "from_to_spine1",
          "ordinal": [
            {
              "ordinal-value": 10,
              "match": {
                "direction": "ingress",
                "source-ipv6-prefix": "fd3d:3d:100:a::1/128"
              },
              "action": {
                "capture": "true"
              }
            },
            {
              "ordinal-value": 20,
              "match": {
                "destination-ipv6-prefix": "fd3d:3d:100:a::1/128",
                "direction": "ingress"
              },
              "action": {
                "capture": "true"
              }
            }
          ]
        }
      ]
    }
  }
}
```

```
supervisor@rtbrick>LEAF01: op> capture acl from_to_spine1 direction both interface
hostif-0/0/3
```

```
Success : ifp capture started
```

```
2022-06-09T07:45:48.358898+0000 7a:2f:78:c0:00:03 > 7a:3f:3e:c0:00:03, ethertype
IPv6 (0x86dd), length 122: (hlim 255, next-header ICMPv6 (58) payload length: 68)
fd3d:3d:100:a::1 > fd3d:3d:100:a::2: [icmp6 sum ok] ICMP6, echo request, seq 1
```

```
2022-06-09T07:45:48.359027+0000 7a:3f:3e:c0:00:03 > 7a:2f:78:c0:00:03, ethertype
IPv6 (0x86dd), length 122: (hlim 64, next-header ICMPv6 (58) payload length: 68)
fd3d:3d:100:a::2 > fd3d:3d:100:a::1: [icmp6 sum ok] ICMP6, echo reply, seq 1
```

```
<...>
```

4.3.5. Filtering by Protocol

In most cases, while using the logical interface and physical interface, you may want to select a packet belonging to a specific protocol. In that case you can use the protocol filter option.

capture interface <interface-name> **direction** <direction> **protocol** <protocol-name>

Example

```
supervisor@rtbrick>LEAF01: op> capture interface ifp-0/0/52 direction both
protocol bgp
```

```
supervisor@rtbrick>LEAF01: op> capture interface ifl-0/0/52/1 direction both
protocol bgp
```

4.3.6. Raw Format

The raw option of the capture tool allows to decode as well as dump the packet in raw format. The **raw** option is useful if you want to examine packets in hex to check for malformed packets, etc.

capture interface <interface-name> **direction** <direction> **raw**

Example

```
supervisor@rtbrick>LEAF01: op> capture interface ifl-0/0/52/1 direction both raw
```

```
supervisor@rtbrick>LEAF01: op> capture interface ifp-0/0/52 direction both raw
```

4.3.7. PCAP File

While debugging a setup with real traffic, analysing all packets on a terminal might be cumbersome. You can use the **pcap** option to save the packets in the PCAP file and later use a tool like Wireshark to analyse the captured traffic.

To start capturing the traffic in a file, enter the following command:

```
capture interface <interface-name> direction <direction> file <file_name.pcap>  
start
```

To stop capturing the traffic in a file, enter the following command:

```
capture interface <interface-name> direction <direction> file <file_name.pcap>  
stop
```

Example

```
supervisor@rtbrick>LEAF01: op> capture interface ifp-0/0/52 direction both file  
test.pcap start
```

```
supervisor@rtbrick>LEAF01: op> capture interface ifp-0/0/52 direction both file  
test.pcap stop
```

5. Logging

5.1. Log Files

5.1.1. Log Files on the Host OS

On the host OS, i.e. RtBrick Host in case of hardware switches, navigate to the `/var/log/` folder and list the available log files:

```
supervisor@spine1:/var/log$ ls -l
total 3064
<...>
-rw-r--r-- 1 root root    2242 Nov  4 11:13 rtbrick-apigwd.log
-rw-r--r-- 1 root root  458617 Nov  4 14:27 rtbrick-ctrld.log
-rw-r--r-- 1 root root     831 Nov  4 11:13 rtbrick-hostconfd.log
-rw-r--r-- 1 root root   73509 Nov  4 14:27 rtbrick-hostnetconfd.log
-rw-r--r-- 1 root root     668 Nov  4 11:13 rtbrick-lxcd.log
-rw-r----- 1 root adm  286356 Nov  4 14:27 syslog
<...>
```

Inspect the log file of interest using one of the standard Linux tools like `cat`, `more`, or `less`. For example:

```
supervisor@spine1:/var/log$ more rtbrick-ctrld.log
```

5.1.2. Log Files in the LXC

In the RBFS container, navigate to the `/var/log/` folder and list the available log files. There will be one active log file per daemon or service, and up to ten compressed (.gz) log files created during log file rotation:

```
supervisor@spine1:/var/log$ ls -l
total 2376
<...>
-rw-r--r-- 1 root  root  48268 Nov  4 15:51 rtbrick-alertmanager-service-out.log
-rw-r--r-- 1 root  root   3451 Oct 30 17:51 rtbrick-alertmanager-service-out.log.1.gz
-rw-r--r-- 1 root  root   2509 Oct 25 00:02 rtbrick-alertmanager-service-out.log.2.gz
-rw-r--r-- 1 root  root      0 Nov  1 01:17 rtbrick-bgp.appd.1-service-out.log
-rw-r--r-- 1 root  root   3333 Oct 30 17:51 rtbrick-bgp.appd.1-service-out.log.1.gz
-rw-r--r-- 1 root  root   3192 Oct 19 13:17 rtbrick-bgp.appd.1-service-out.log.2.gz
<...>
```



The log files for brick daemons include only basic logs referring to the operation of the daemon itself. The actual applications like

routing or service protocols use log tables described in the [BDS Logging](#) section. In contrast, Prometheus and Alertmanager are no BDs and use log files as the primary means of logging. Inspect the log file of interest using one of the standard Linux tools like cat, more, or less. For example:

```
supervisor@spine1:/var/log$ more rtbrick-prometheus-service-out.log
```

5.2. BDS Logging

5.2.1. Enabling BDS Logging

BDS logging is enabled per BD, per module, and per group by configuration. By default, BDS logging is enabled for all daemons and all modules with level Error. Verify the log status of the module and optionally per daemon. The following output reflects a default configuration:

```
supervisor@spine2: op> show log status module bgp bd bgp.iod.1
Module log status:
  bgp:
    bgp.iod.1:
      Level: error, Plugin: None
      Log group status:
        Group          Level      Plugin      Rate limit
        config         error      None        10
        general        error      None        10
        generic         error      None        10
        <...>
```

For troubleshooting an application, enable a more detailed log level. First example, enable and verify logging with level Info for the bgp.iod and all groups of the BGP module:

```
supervisor@spine2: cfg> set log bd bgp.iod.1 module bgp level info
supervisor@spine2: cfg> commit

supervisor@spine2: op> show log bgp.iod.1 status
<...>
supervisor@spine2: op> show log status module bgp bd bgp.iod.1
Module log status:
  bgp:
    bgp.iod.1:
      Level: info, Plugin: None
      Log group status:
        Group          Level      Plugin      Rate limit
        config         info      None        10
        general        info      None        10
```

generic <...>	info	None	10
------------------	------	------	----

Second example, enable and verify logging with level Debug specifically for the PPP and PPPoE group of logs:

```

supervisor@leaf2: cfg> set log bd pppoe.1 module pppoe group ppp level debug
supervisor@leaf2: cfg> set log bd pppoe.1 module pppoe group pppoe level debug
supervisor@leaf2: cfg> commit
supervisor@leaf2: cfg>

supervisor@leaf2: op> show log status module pppoe
Module log status:
  pppoe:
    pppoe.1:
      Level: error, Plugin: None
      Log group status:
        Group          Level      Plugin      Rate limit
        config          error      None         10
        dhcpv6          error      None         10
        general          error      None         10
        generic          error      None         10
        ppp              debug      None         10
        pppoe            debug      None         10
        subscriber       error      None         10

```

For a complete and detailed description of the logging configuration, please refer to the RBFS Logging Guide.

5.2.2. Inspecting Log Tables

BDS log tables are created on demand by the daemons if logging is enabled and there is an event to log. Use the 'show log table' command to look into the log tables:

```

supervisor@leaf2: op> show log table bgp.logs
[ Info ] <2021-07-16T06:57:14.434358+0000> BGP peer fe80::7825:1dff:fe60:202, source
fe80::7828:3bff:fe60:101, hostname spine1, instance default reset, reason Notification received
[ Info ] <2021-07-16T06:57:14.435583+0000> BGP FSM change, peer fe80::7825:1dff:fe60:202, source
fe80::7828:3bff:fe60:101, hostname -, instance default changed state from Established to Idle, reason Cease,
Sub-Code: Admin reset
[ Info ] <2021-07-16T06:58:01.033211+0000> Created table(default.bgp.rib-
in.ipv6.unicast.fe80::7825:1dff:fe60:202.fe80::7828:3bff:fe60:101)
[ Info ] <2021-07-16T06:58:01.033290+0000> Created table(default.bgp.rib-in.ipv6.labeled-
unicast.fe80::7825:1dff:fe60:202.fe80::7828:3bff:fe60:101)
[ Info ] <2021-07-16T06:58:01.033347+0000> Created table(default.bgp.rib-in.ipv4.vpn-
unicast.fe80::7825:1dff:fe60:202.fe80::7828:3bff:fe60:101)
[ Info ] <2021-07-16T06:58:01.033401+0000> Created table(default.bgp.rib-in.ipv6.vpn-
unicast.fe80::7825:1dff:fe60:202.fe80::7828:3bff:fe60:101)
[ Info ] <2021-07-16T06:58:01.344927+0000> BGP FSM change, peer fe80::7825:1dff:fe60:202, source
fe80::7828:3bff:fe60:101, hostname spine1, instance default changed state from Idle to Established, reason
None
[ Info ] <2021-07-16T06:58:03.471937+0000> BGP message received from peer fe80::7825:1dff:fe60:202,
source fe80::7828:3bff:fe60:101, hostname spine1, instance default decode failed. Message type 2
<...>

```

The 'show log table' command supports various filter options. You can filter on the level, module, or a regular expression. Example:

```
supervisor@spine2: op> show log table bgp.logs filter level error
supervisor@spine2: op>
```

For a complete and detailed description of the filter options, please refer to the RBFS Logging Guide.

6. Reporting Issues to RtBrick

Accessing RtBrick support is done via the RtBrick webpage, in the support section: <https://www.rtbrick.com/fix-a-problem/contact-our-experts-now>. To be able to open a support case, you need an active business contract, and a support account at RtBrick.

6.1. Support Portal login page


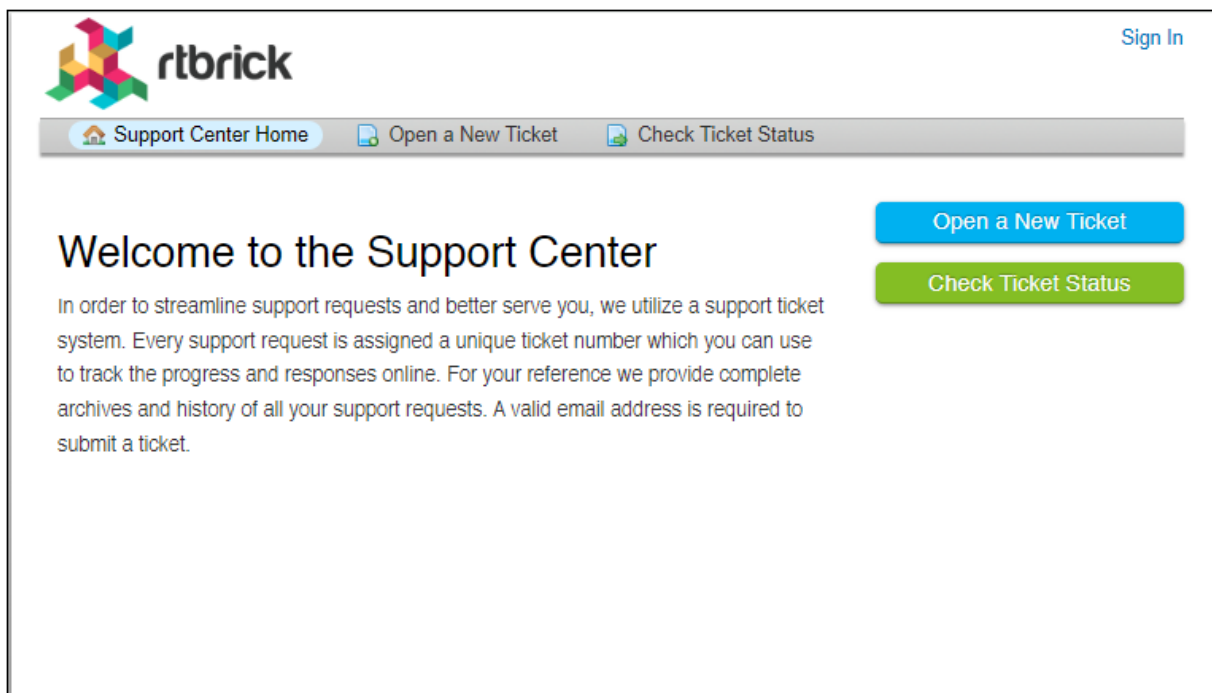


Figure 1. Support Portal Login Page

On the <https://www.rtbrick.com/fix-a-problem/contact-our-experts-now> page, click the *customer support portal* link; you will be redirected to the Customer Portal. In the support page that appears, if you don't have any cases already opened, you will be presented with a form to open a case; on the righthand side you will have quick links to documentation and products. Note that fields marked with an asterisk are mandatory. After filling in all the information, press the submit button on the bottom of the page.

6.2. Opening a case

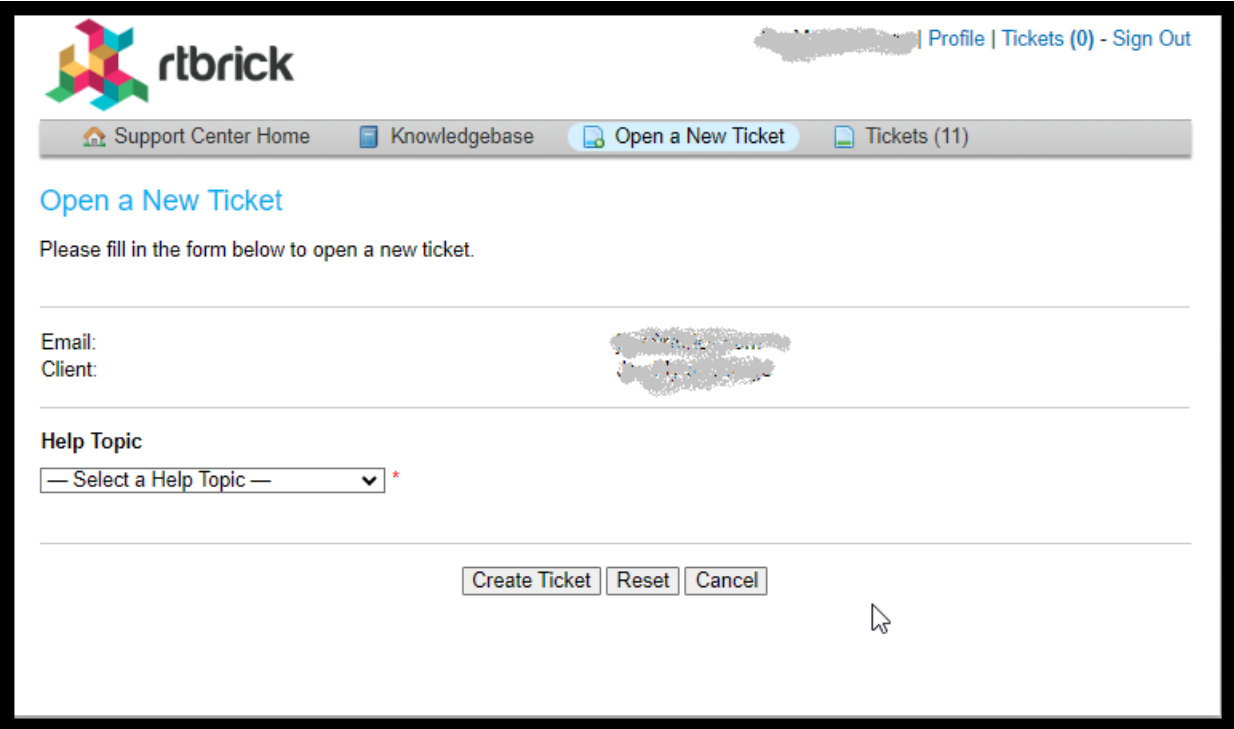

The screenshot shows the 'rtbrick' support portal interface. At the top, there is a navigation bar with links for 'Support Center Home', 'Knowledgebase', 'Open a New Ticket' (highlighted), and 'Tickets (11)'. The user's profile and 'Sign Out' link are visible in the top right. Below the navigation bar, the page title is 'Open a New Ticket'. A message states: 'Please fill in the form below to open a new ticket.' The form includes fields for 'Email:' and 'Client:', both of which are redacted with grey boxes. Below these is a 'Help Topic' section with a dropdown menu showing '— Select a Help Topic —' and a red asterisk indicating it is a required field. At the bottom of the form are three buttons: 'Create Ticket', 'Reset', and 'Cancel'. A mouse cursor is visible near the bottom right of the form area.

Figure 2. Opening a case in the support portal

To help solving the case in a timely manner, basic information must be given in order to pinpoint the issue:

- If the issue was encountered on a virtual installation or on a physical box
- The RBFS image role (spine/access leaf), the version, and the patch version
- Any logs and/or comments: for logs you can use the "Add attachment" link in the support page, and comments can be posted after the case is submitted.

6.3. Debugger Information Utility Program

In RBFS, every daemon maintains a set of tables containing data specific to its functions. These daemon-specific tables help in a deeper analysis of issues, allowing for targeted debugging based on the specific functions and responsibilities of each daemon.

RBFS implements a debugger information utility program. This utility allows you to retrieve table information from all or a few specific modules. This information also includes log files, diagnostic messages, CPU and memory states, and current and previous configurations. This utility program can be run whenever an issue is encountered with RBFS and needs to be reported to customer support.

The utility program collects data and converts this into a JSON file format. Each collected file is named after the respective table name or data it contains and is stored in a directory named with the corresponding timestamp. This directory is compressed into a zip file and saved in the following directories:

- manual: /var/crash/debug_info/manual
- cron: /var/crash/debug_info/cron_job

You can then attach and send this zipped file to the RtBrick support team. This information is valuable for troubleshooting many types of network issues, as it allows the support team to analyze the router's state and configurations without directly accessing the router.

When users, who do not have the necessary permissions, attempt to access data from a table by executing the command, they will not be able to view the retrieved data.

6.3.1. How to Retrieve Data Using the Utility Program

To retrieve data, you can run the `collect debug-information` command in any of the modes: 'config', 'debug', 'operation'.

The following is the command syntax:

collect debug-information <option>

Attribute	Description
<code>all</code>	This option retrieves data from all daemons.
<code>cron</code>	Starts cron job.
<code>daemon</code>	This option allows you to specify the daemon/module name so that the utility retrieves data only for that specific module/daemon.

To collect debug information for all modules, use the following command:

`collect debug-information all`



After executing the command, the data collection process takes a few seconds or minutes to complete.

TACACS users can collect the debug information by specifying the following option in the TACACS Server configuration.


`linux-group="debug_info,rtbrick_confid_sock_access.`

For more details see, *TACACS Server configuration* in the "Securing Control Plane Management Guide".

For local user it is mandatory to configure debug information collection using the following command:

```
set system user <username> role debug_info
```

The following example command execution shows the date and time in sequential order as each daemon's data is fetched. It also shows the total time taken to complete the collection process at the end

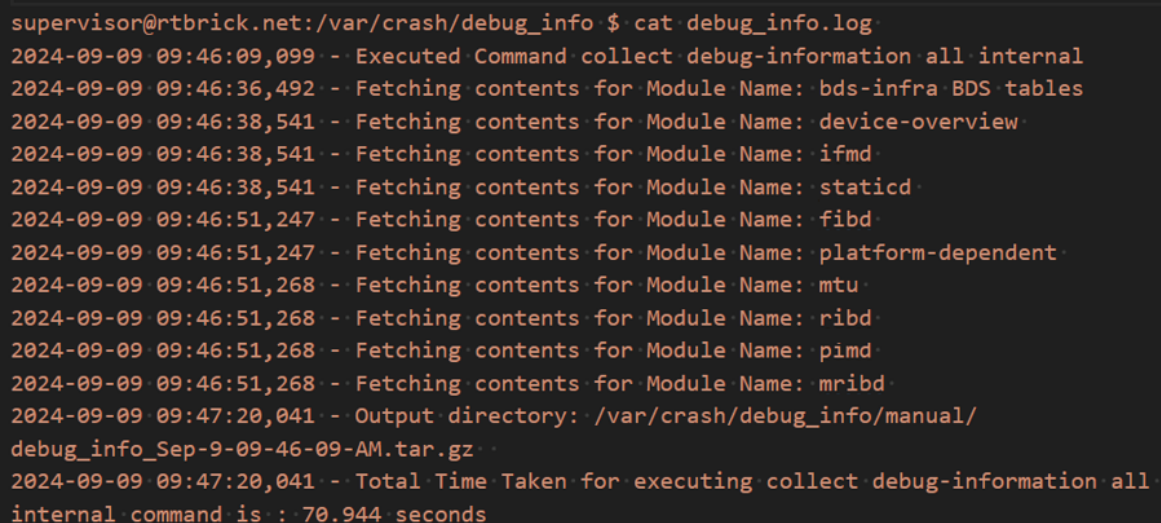A terminal window with a dark background and orange text. The prompt is 'supervisor@rtbrick.net:/var/crash/debug_info \$'. The command 'cat debug_info.log' has been executed. The output shows a series of log entries with timestamps and descriptions of the data collection process. The entries include: 'Executed Command collect debug-information all internal', 'Fetching contents for Module Name: bds-infra BDS tables', 'Fetching contents for Module Name: device-overview', 'Fetching contents for Module Name: ifmd', 'Fetching contents for Module Name: staticd', 'Fetching contents for Module Name: fibd', 'Fetching contents for Module Name: platform-dependent', 'Fetching contents for Module Name: mtu', 'Fetching contents for Module Name: ribd', 'Fetching contents for Module Name: pimd', 'Fetching contents for Module Name: mribd', 'Output directory: /var/crash/debug_info/manual/debug_info_Sep-9-09-46-09-AM.tar.gz', and 'Total Time Taken for executing collect debug-information all internal command is : 70.944 seconds'.

```
supervisor@rtbrick.net:/var/crash/debug_info $ cat debug_info.log
2024-09-09 09:46:09,099 - Executed Command collect debug-information all internal
2024-09-09 09:46:36,492 - Fetching contents for Module Name: bds-infra BDS tables
2024-09-09 09:46:38,541 - Fetching contents for Module Name: device-overview
2024-09-09 09:46:38,541 - Fetching contents for Module Name: ifmd
2024-09-09 09:46:38,541 - Fetching contents for Module Name: staticd
2024-09-09 09:46:51,247 - Fetching contents for Module Name: fibd
2024-09-09 09:46:51,247 - Fetching contents for Module Name: platform-dependent
2024-09-09 09:46:51,268 - Fetching contents for Module Name: mtu
2024-09-09 09:46:51,268 - Fetching contents for Module Name: ribd
2024-09-09 09:46:51,268 - Fetching contents for Module Name: pimd
2024-09-09 09:46:51,268 - Fetching contents for Module Name: mribd
2024-09-09 09:47:20,041 - Output directory: /var/crash/debug_info/manual/
debug_info_Sep-9-09-46-09-AM.tar.gz
2024-09-09 09:47:20,041 - Total Time Taken for executing collect debug-information all
internal command is : 70.944 seconds
```

Figure 3. Debug Information Collection Example

6.3.2. Periodic Data Collection

This utility program can also help in collecting system states and other information at scheduled intervals. This periodically collected information helps in understanding the system state before an issue occurs, which is useful in many scenarios.

The utility can be configured to automatically run at predefined intervals to collect data. After each run, it saves reports that can be used for further analysis and troubleshooting. You can define the intervals for periodic data collection to suit

your needs.

The system employs Cron Job functionality to collect this periodic debugging information. A Cron Job is a scheduled task that runs automatically at specified intervals.

You can configure the Cron Job functionality to enable periodic data collection.

Setting Up Cron Job

You can specify the data collection interval, limit the number of files, and initiate the Cron job function.

Specify the Interval:

Define how frequently the system should collect debug information. The interval is specified in hours. The default interval for running the utility is 12 hours. Use the command:

```
set debug-information collector interval <interval>
```

Attribute	Description
<code>interval</code>	Specifies the interval (in hours) for running the Debug Information (DUI) cron job. Range: 2 – 168 hours.

Specify the File Limit:

Specify the maximum number of files to be stored for such runs. Once the limit is reached, the system will start overwriting the oldest files and this process continues. The default maximum number of files is 10. Use the command:

```
set debug-information collector max-files <max_files>
```

Attribute	Description
<code><max_files></code>	Specifies the maximum number of Debug Information (DUI) files that the cron job can retain. Range: 1 – 50.

Stopping the Cron Job Function

You can use the following delete form of the command to halt the ongoing Cron Job process.

delete debug-information collector

Registered Address	Support	Sales
40268, Dolerita Avenue Fremont CA 94539		
+1-650-351-2251		+91 80 4850 5445
http://www.rtbrick.com	support@rtbrick.com	sales@rtbrick.com

©Copyright 2024 RtBrick, Inc. All rights reserved. The information contained herein is subject to change without notice. The trademarks, logos and service marks ("Marks") displayed in this documentation are the property of RtBrick in the United States and other countries. Use of the Marks are subject to RtBrick's Term of Use Policy, available at <https://www.rtbrick.com/privacy>. Use of marks belonging to other parties is for informational purposes only.